



Feel the good vibes

DJ EQUIPMENTS | PA SYSTEMS



About us

PENZA Audio is a German based designer and manufacturer of professional sound system established in 1998. Our notions is based on producing high quality products for the places where sound really matters. Nowadays, Penza Audio specializes in designing and supplying audio and lightning system to such facilities as :

- ▶ DJ Events
- ▶ Hospitality and Entertainment.
- ▶ Educational Establishment.
- ▶ Shopping Centre and Store.
- ▶ Installation and Backing Administrations.
- ▶ Places of Worship.
- ▶ Governmental and Military Agencies.

We believe that developing superior quality control, professional products considerate sales team and comprehensive after sales services are the foundations for customer satisfaction and company growth. Our products are actually sold through a network of qualified 180+ distributors in more then 300+ cities.

OUR MISSION

Providing best and high quality products and ensuring complete customer satisfaction.

OUR VISION

Our vision is to give the greatest sound quality to our client with an objective to offer best assistance and things as an association of significance.



CONFERENCE SYSTEM



24 INCH

CHAIRMAN DELEGATE



Conference Wired Microphone

DM-100 / CM-100

- Pluggable microphone with red speech instruction.
- The microphone switch is equipped with a two-color speech status indicator hello.
- It has its own 2.1 m 8P cable.
- The microphone unit is provided with DC24V power by the system host, which belongs to the safety range.
- Chairman unit is not limited by meeting mode and number, and can be placed at any position.
- Turn on the automatic mute function of microphone speakers, with headphone jack and volume adjustment.
- The chairman has the priority of speaking to control the order of the meeting, and can close the speaking representative unit.



24 INCH

CHAIRMAN DELEGATE



Conference Wireless Microphone

DV-8000

- The microphone unit adopts 1.77 inch TFT color display screen to display the microphone frequency, working status and working mode.
- The imported silent touch switch is used to ensure the durability of the switch.
- Ultra low power consumption design, with 3 AA alkaline batteries, it can work continuously for 8-12 hours.
- The chairman priority function can turn off the representative microphone to maintain the order of the meeting place.
- Working power supply: DC2.8-4.5V;
- Consumption power: 380mW (speaking state);
- Size: 115 * 140 * 6.5 (mm)

AMPLIFIERS



Penza audio is an industry-leading amplifier manufacturer. The company design and produces DJ & PA Power Amplifiers to meet the Force sound quality for a long life Product, PENZA AUDIO Power amplifiers are top-level in terms of reliability, functionality and performance-to- price. The power amplifier of an audio setup is essential in getting the best results. Choosing the right amplifier for your loudspeakers and overall sound system is a big decision. These amplifiers are mainly Designed by long life Products with a good durability of punch sound.



College



Stadium




DJ Events



Hospital

Airport | DJs Events | Stadiums | Fair & Exhibitions
Defence Installations | Bus Terminal | Announcements
Music Schools | Colleges | Place of Worship.



CA+ SERIES



CA 20+

CA 18+

CA 12 +

PENZA CA Plus series has been improved with a new attractive front panel design and implementing renowned high efficiency Class H technology for an even better sound quality on these mid-range power amplifier series. With an enhanced and also adjustable internal X-Over functionality, the CA+ series represent an exponent on speaker's adaptability to reach the best performance on multi-way bi-amplified sound reinforcement systems.

MODEL NO.	CA 20+	CA 18+	CA 12+
2Ω STEREO	3200W	2600W	1950W
4Ω STEREO	2900W	2800W	1500W
8Ω STEREO	1550W	1350W	1000W
4Ω BRIDGE	5800W	4800W	3600W
8Ω BRIDGE	4250W	3650W	2750W
DISTORTION	0.02%	0.02%	0.02%
DAMPING FACTOR	>500	>500	>500
CLASS	3 Step H Class	3 Step H Class	3 Step H Class
DIMENSIONS (MM)	W483 x D432 x H133	W483 x D432 x H133	W483 x D432 x H133
WEIGHT	44.00 KG	42.00 KG	38.50 KG

CA SERIES



CA 20

CA 18

CA 12

PENZA CA series has been improved with a new attractive front panel design and implementing renowned high efficiency Class H technology for an even better sound quality on these mid-range power amplifier series. With an enhanced and also adjustable internal X-Over functionality, the CA series represent an exponent on speaker's adaptability to reach the best performance on multi-way bi-amplified sound reinforcement systems.

MODEL NO.	CA 20	CA 18	CA 12
2Ω STEREO	3000W	2400W	1750W
4Ω STEREO	2100W	1800W	1300W
8Ω STEREO	1350W	1150W	800W
4Ω BRIDGE	5400W	4600W	3400W
8Ω BRIDGE	4050W	3450W	2550W
DISTORTION	0.02%	0.02%	0.02%
DAMPING FACTOR	>500	>500	>500
CLASS	3 Step H Class	3 Step H Class	3 Step H Class
DIMENSIONS (MM)	W483 x D432 x H133	W483 x D432 x H133	W483 x D432 x H133
WEIGHT	43.00 KG	41.00 KG	38.00 KG

MT SERIES



MT 2201 | MT 1601 | MT 1201

PENZA MT Series are the highest selling series of Amplifiers in its class in India, they offer a stupendous 99% reliability and the internal hardware is strong to handle the quality of transportation, it has heart throbbing bass when coupled with Penza 18" bass drivers and has one of the highest quality to value for money ratio.

MODEL NO.	MT 2201	MT 1601	MT 1201
2Ω STEREO	4000W	3000W	2500W
4Ω STEREO	3600W	2250W	1850W
8Ω STEREO	2250W	1700W	1350W
4Ω BRIDGE	7800W	5200W	4500W
8Ω BRIDGE	7000W	4200W	3700W
DISTORTION	0.01%	0.01%	0.01%
DAMPING FACTOR	>1000	>1000	>800
CLASS	D	H	H
DIMENSIONS (MM)	W482 x D483 x H132	W482 x D483 x H132	W482 x D483 x H132
WEIGHT	50 KG	47.00 KG	41.00 KG

DJ SETUP SERIES



TD-36000 | **DJX-32000** | **AXL-4**

PENZA DJ Setup Series are the highest selling series of Amplifiers in its class in India, they offer a stupendous 99% reliability and the internal hardware is strong to handle the quality of transportation, it has heart throbbing bass when coupled with Penza 18" bass drivers and has one of the highest quality to value for money ratio.

MODEL NO.	TD-36000	DJX-32000	AXL-4
2Ω STEREO	4000W	3000W	2500W
4Ω STEREO	3600W	2250W	1850W
8Ω STEREO	2250W	1700W	1350W
4Ω BRIDGE	7800W	5200W	4500W
8Ω BRIDGE	7000W	4200W	3700W
DISTORTION	0.01%	0.01%	0.01%
DAMPING FACTOR	>1000	>1000	>800
CLASS	TD	H	H
DIMENSIONS (MM)	W482 x D483 x H132	W482 x D483 x H132	W482 x D483 x H132
WEIGHT	50 KG	47.00 KG	41.00 KG

ND SERIES



ND 5000

ND 4000

ND series power amplifier covers the height of 2U-3U

The ND series can withstand stereo 2Ω and bridged 4Ω loads, suitable for driving linear array speaker systems. ND Series is suitable for large-scale touring performances, band performances, DISCO. Nightclubs and other occasions. Mode: Bridge mode, parallel mode, stereo mode. Power on to prevent power shock, start-up volume increasing, start-up soft start, peak clipping limiter.

Temperature, short circuit, over current, overload, pressure limit, DC detection.

MODEL NO.	ND 5000	ND 4000
2Ω STEREO	4000W	3000W
4Ω STEREO	3600W	2250W
8Ω STEREO	2250W	1700W
4Ω BRIDGE	7800W	5200W
8Ω BRIDGE	7000W	4200W
DISTORTION	0.01%	0.01%
DAMPING FACTOR	>1000	>1000
CLASS	H	H
DIMENSIONS (MM)	W482 x D483 x H132	W482 x D483 x H132
WEIGHT	50 KG	47.00 KG

PJ SERIES



PJ 4K2

PJ 3K2

PJ 2K2

DUAL CHANNEL POWER AMPLIFIER

Penza Audio PJ-4K2, PJ-3K2, PJ-2K2 is a rugged and most reliable Amplifier professionals requiring sonically superior high power sound performance. It has in-built frequency controls (BASS/MID/TREBLE) which enable precise and accurate tonal setting of sound quality. 2 Channels for Stereo DJ Programmers. High fidelity sound output at low distortion. Individual bar-graph for each channel with dip indication, Stereo/Mono Selector switch, Short circuit, Overload & over-temperature protection. Force cooling for both channels.

MODEL NO.	PJ 4K2	PJ 3K2	PJ 2K2
POWER OUTPUT	2200+2200W MAX, 2000+2000 RMS	1700+1700W MAX , 1500+1500 RMS	1200+1200W MAX, 1000+1000 RMS
TONE CONTROL	BASS, MID, TREBLE	BASS, MID, TREBLE	BASS, MID, TREBLE
INPUT IMPEDANCE	10K Unbalanced	10K Unbalanced	10K Unbalanced
CHANNEL SEPARATION	70dB @1KHz	70dB @1KHz	70dB @1KHz
DAMPING FACTOR	500:1 @ 8Ω Load	500:1 @ 8Ω Load	500:1 @ 8Ω Load
PROTECTIONS	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload
COOLING	4 AC Fan (120mm x 120mm)	2 AC Fan (120mm x 120mm)	2 AC Fan (120mm x 120mm)
FREQUENCY RESPONSE	30-20,000 Hz	30-20,000 Hz	30-20,000 Hz
POWER SUPPLY	220~240V, 50/60Hz	220~240V, 50/60Hz	220~240V, 50/60Hz
DIMENSIONS	W560 x H160 x D500 mm	W500 x H155 x D470 mm	W505 x H155 x D440 mm
WEIGHT	40.30 KG	31.50 KG	23.40 KG

DJ SERIES



PJ-6KH | PJ-4000i | PJ-4KH

MODEL NO.	PJ-6KH	PJ-4000i	PJ-4KH
POWER OUTPUT	3200W X 2 MAX. 3000W X 2 RMS.	2200+2200W MAX, 2000+2000 RMS	2200+2200W MAX, 2000+2000 RMS
TONE CONTROL	CH1 CH2	BASS, MID, TREBLE	BASS, MID, TREBLE
INPUT CHANNELS	39 Ω Unbalanced	10K Unbalanced	10K Unbalanced
SIGNAL TO NOISE RATIO	70dB	70dB @1KHz	70dB @1KHz
SPEAKER OUTPUTS	2 Ω , 4 Ω , 8 Ω , 70/100V	500:1 @ 8 Ω Load	500:1 @ 8 Ω Load
PROTECTIONS	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload
COOLING	4 Force Cooling (120mm AC Fan)	4 AC Fan (120mm x 120mm)	4 AC Fan (120mm x 120mm)
FREQUENCY RESPONSE	50-15,000Hz	30-20,000 Hz	30-20,000 Hz
POWER SUPPLY	220~240V, 50/60Hz	220~240V, 50/60Hz	220~240V, 50/60Hz
DIMENSIONS	W580 x H160 x D520mm	W560 x H160 x D500 mm	W560 x H160 x D500 mm
WEIGHT	40.00 KG	40.30 KG	40.30 KG

DJ SERIES



PXA-3200



M2K5



PJ-1K2M

MODEL NO.	PXA3200	M2K5	PJ-1K2M
POWER OUTPUT	1700 W + 1700 W MAX, 1600 W + 1600 W	1100+1100W MAX , 2Ω 1000+1000 RMS	1100+1100W MAX , 2Ω 1000+1000 RMS
TONE CONTROL	CH1 CH2	BASS, MID, TREBLE	BASS, MID, TREBLE
INPUT CHANNELS	39 Ω Unbalanced	10K Unbalanced	10K Unbalanced
SIGNAL TO NOISE RATIO	70dB	70dB @1KHz	70dB @1KHz
SPEAKER OUTPUTS	2Ω, 4Ω, 8Ω, 70/100V	500:1 @ 8Ω Load	500:1 @ 8Ω Load
PROTECTIONS	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload
COOLING	2 Force Cooling (120mm AC Fan)	2 AC Fan (120mm x 120mm)	2 AC Fan (120mm x 120mm)
FREQUENCY RESPONSE	50-15,000Hz	30-20,000 Hz	30-20,000 Hz
POWER SUPPLY	220~240V, 50/60Hz	220~240V, 50/60Hz	220~240V, 50/60Hz
DIMENSIONS	W580 x H110 x D520mm	W505 x H155 x D440 mm	W505 x H155 x D440 mm
WEIGHT	32.00 KG	23.40 KG	23.40 KG

DJ SERIES

PJ 1600

- Penza Audio PJ-1600 is rugged and most reliable amplifier
- Specially designed for wide variety of PA applications and DJ Performances.
- It can be connected to various input sources like a PA Mixer, DJ Mixer, CD/DVD player, Cassette player and Musical Instruments like Guitar, Keyboard etc.
- The amplifier has built-in protection: against over voltage in AC mains supply which is specially useful while operating on Gensets.



PJ 1300M V2

- Penza Audio PJ1300M V2 is rugged and most reliable amplifier
- Specially designed for wide variety of PA applications and DJ Performances.
- It can be connected to various input sources like a PA Mixer, DJ Mixer, CD/DVD player, Cassette player and Musical Instruments like Guitar, Keyboard etc.
- The amplifier has built-in protection: against over voltage in AC mains supply which is specially useful while operating on Gensets.



MX 1200 / 1201

- Penza 1200W is Booster Amplifier designed for use in a wide variety of PA applications and DJ performances.
- Signal (Line) in and Signal (Line) out to enable interconnections with other power amplifiers.
- Indicator LEDs for Power, Signal, Temperature, and DC fault conditions have been provided.
- Built-in AC fan to avoid the amplifier over heat and Short circuit and over temperature.
- Box Speaker/ Driver Unit selector switch.
- Bass boost defeated at Driver Unit position for safer operation of driver units.



PRO 600 D

- PENZA Audio PRO 600D amplifier is specially designed for DJ events.
- Signal (Line) in and Signal (Line) out to enable interconnections with other power amplifiers.
- Protected against DC Fault, Overload, Short circuit and over temperature.
- Indicator LEDs for Power, Signal, Temperature, and DC fault conditions have been provided.
- Built-in AC fan to avoid the amplifier over heat. Box Speaker / Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.



MODEL NO.	PZ 1600	MX 1200 / 1201	PRO 600 D
POWER OUTPUT	2000 W MAX. 1600 W RMS.	1600 W MAX. 1200 W RMS.	1000 W MAX. 600 W RMS.
TONE CONTROL	BASS, MID, TREBLE	BASS, MID, TREBLE	BASS, MID, TREBLE
INPUT CHANNELS	39 Ω Unbalanced	1 x 200 mV/ 100 K Ω	1 x 200 mV/ 1V (Switchable)
SIGNAL TO NOISE RATIO	70dB	70dB	60dB
SPEAKER OUTPUTS	2 Ω , 4 Ω , 8 Ω , 70/100V	2 Ω , 4 Ω , 8 Ω , 70/100V	2 Ω , 4 Ω , 70/100V
PROTECTIONS	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload
COOLING	Force Cooling (120mm AC Fan)	Force Cooling (120mm AC Fan)	Force Cooling (120mm AC Fan)
FREQUENCY RESPONSE	50-15,000Hz	50-15,000Hz	50-15,000Hz
POWER SUPPLY	220~240V, 50/60Hz	220~240V, 50/60Hz	220~240V, 50/60Hz
DIMENSIONS	W505 x H155 x D500mm	W500 x H155 x D412 mm	W490 x H155 x D415mm
WEIGHT	26.00 KG	24.60 KG	20.90 KG

DJ SERIES

PZA-7000M-UBR

- 350+350W, 6 Mic, 2 Aux Inputs and CD/Stereo music input (L&R).
- 70V & 100V for each zone
- Built-in MP3 player with remote control and LCD display for BT, USB, SD/MMC card reader.
- Stereo/Mono switch to change ambience of MP3 music player & CD/Stereo music for DJ programmes
- Facilitates connection and operation of two separate groups of speakers simultaneously. Ideal for Places of Worship.
- Line Input & Output on each zone for connecting to a Mixer and Booster Amplifier respectively. Preamplifier output for recording.



SPA-5000

- Line Input 200mV/1V switchable for connecting a mixer or another amplifier.
- Resettable circuit breaker for protection against overload and short circuit.
- Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker/Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.
- Ideal for large installations where a high power output is required.
- A combination of Penza SSA-5000DP and one SPA-5000 can deliver 1000W power output.



SSA-5000DP

- 7 Mic & 2 Aux Inputs. With Built-in Digital Player & Bluetooth Connectivity.
- Preamplifier and Line Output for connecting to a Booster Amplifier.
- Line Input for connecting the output from any external Mixer or another Amplifier.
- Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker/Driver Unit selector switch. Bass boost
- Defeated at Driver Unit position for safer operation of Driver units.



SSA-350DP

- 6 Mic & 2 Aux Inputs. With built-in Digital Player & Bluetooth Connectivity.
- Pre-amplifier and Line Output for connecting to a Booster Amplifier and for recording the program.
- Line Input for connecting the output from any external mixer or permitting SSA-350 DP to be used as a Booster Power Amplifier.
- Resettable circuit breaker for protection against overload and short circuit. Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker/Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.



MODEL NO.	SPA-5000	SSA-5000DP	SSA-350DP
POWER OUTPUT	750 W MAX. 500 W RMS.	750 W MAX. 500 W RMS.	500 W MAX. 350 W RMS.
TONE CONTROL	BASS, TREBLE	BASS, TREBLE	BASS, TREBLE
INPUT CHANNELS	1 x 200 mV/ 100 K Ω	7 x Mic 0.8mV/ 4.7k Ω , 2 x AUX 100mV/ 470K Ω	6 x Mic 0.8mV/ 4.7k Ω , 2 x AUX 100mV/ 470K Ω
DIGITAL PLAYER		MP3 Player with USB, SD Card, BT connectivity	MP3 Player with USB, SD Card, BT connectivity
SIGNAL TO NOISE RATIO	60dB	60dB	60dB
SPEAKER OUTPUTS	4 Ω , 8 Ω , 70/100V	4 Ω , 8 Ω , 70/100V	4 Ω , 8 Ω , 70/100V
PROTECTIONS	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload	Temp. DC Short circuit Overload
COOLING	Auto Cooling	Auto Cooling	Auto Cooling
FREQUENCY RESPONSE	50-15,000Hz	50-15,000Hz	50-15,000Hz
POWER SUPPLY	220~240V, 50/60Hz DC:36V	220~240V, 50/60Hz, DC: 36V	220~240V, 50/60Hz, DC:24V (2 x 12V Car Battery)
DIMENSIONS	W510 x H172 x D385mm	W510 x H172 x D385mm	W450 x H160 x D340mm
WEIGHT	23.50 KG	24.50 KG	16.50 KG

DIGITAL AMPLIFIER

SSA 300DX

- 6 Mic & 2 Aux Inputs. With built-in Digital Player & Bluetooth Connectivity.
- Pre-amplifier and Line Output for connecting to a Booster Amplifier and recording the programs.
- Line input for connecting the output from any external mixer or permitting SSA-350DP USB to be used as a Booster Power Amplifier.
- Resettable circuit breaker for protection against overload and short circuit.
- Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker / Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of DRIVER UNITS.



SSA-160 DP

- 5 Mic & 2 Aux Inputs. With built-in Digital Player & Bluetooth Connectivity.
- Pre-amplifier and Line Output for connecting to a Booster Amplifier and for recording the program.
- Line Input for connecting the output from any external mixer or another Amplifier.
- Resettable circuit breaker for protection against overload and short circuit.
- Instant transfer to DC power (Car Battery) if AC power fails.
- Box Speaker / Driver Unit selector switch. Bass boost defeated at Driver Unit position for safer operation of driver units.
- 5 LED array for output level monitoring.



SSB-120DP

- 5 Mic & 2 Aux Inputs. With built-in Digital Player & Bluetooth Connectivity.
- Line output for connecting to a Booster Amplifier and Preamplifier Output for recording the program.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC power (Car Battery) if AC power fails.
- 5 LED array for output level monitoring.



MODEL NO.	SSA 300DX	SSA-160 DP	SSB-120DP
POWER OUTPUT	450 W MAX. 300 W RMS.	220 W MAX. 160 W RMS.	160 W MAX. 120 W RMS.
TONE CONTROL	BASS, TREBLE	BASS, TREBLE	BASS, TREBLE
INPUT CHANNELS	6 x Mic 0.8mV/ 4.7kΩ, 2 x AUX 100mV/ 470KΩ	5 x Mic 0.8mV/ 4.7kΩ, 2 x AUX 100mV/ 470KΩ	7 x Mic 0.8mV/ 4.7kΩ, 2 x AUX 100mV/ 470KΩ
DIGITAL PLAYER	MP3 Player with USB, SD Card, BT connectivity	MP3 Player with USB, SD Card, BT connectivity	MP3 Player with USB, SD Card, BT connectivity
SIGNAL TO NOISE RATIO	60dB	60dB	60dB
SPEAKER OUTPUTS	4Ω, 8Ω, 70/100V	4Ω, 8Ω, 70/100V	4Ω, 8Ω, 16Ω 70/100V
PROTECTIONS			
COOLING	Auto Cooling	Auto Cooling	Auto Cooling
FREQUENCY RESPONSE	50-15,000Hz	50-15,000Hz	50-15,000Hz
POWER SUPPLY	220~240V, 50/60Hz, DC:36V (3x12V Car Battery)	220~240V, 50/60Hz, DC:24V (2x12V Car Battery)	220~240V, 50/60Hz, DC:24V (2x12V Car Battery)
DIMENSIONS	W450 x H160 x D340mm	W390 x H145 x D320mm	W385 x H140 x D300mm
WEIGHT	14.50 KG	12.50 KG	12.00 KG

DIGITAL AMPLIFIER



PZ-770

- 4 Mic & 1 Aux Input. With built-in Digital Player & Bluetooth Connectivity.
- Line Output for connecting to a Booster Amplifier.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC Power (Car Battery) if AC power fails.
- 2 LED array for output level monitoring.



PZA-570

- 3 Mic & 1 Aux Input. With built-in Digital Player & Bluetooth Connectivity.
- Line Output for connecting to a Booster Amplifier.
- Cut and Boost type Bass & Treble controls.
- Instant transfer to DC Power (Car Battery) if AC power fails.



PZA-370

- 2 Mic & 1 Aux Input. With built-in Digital Player & Bluetooth Connectivity.
- Line Output for connecting to a Booster Amplifier.
- Cut type tone control.
- Instant transfer to DC Power (Car Battery) if AC power fails.



MODEL NO.	PZ-770	PZA-570	PZA-370
POWER OUTPUT	100 W MAX . 75 W RMS.	75 W MAX. 50 W RMS.	50 W MAX. 30 W RMS.
TONE CONTROL	BASS, TREBLE	BASS, TREBLE	BASS, TREBLE
INPUT CHANNELS	4 x Mic 0.8mV/ 4.7kΩ, 2 x AUX 100mV/ 470KΩ	3 x Mic 0.8mV/ 4.7kΩ, 2 x AUX 100mV/ 470KΩ	2 x Mic 0.8mV/ 4.7kΩ, 2 x AUX 100mV/ 470KΩ
DIGITAL PLAYER	MP3 Player with USB, SD Card, BT connectivity	MP3 Player with USB, SD Card, BT connectivity	MP3 Player with USB, SD Card, BT connectivity
SIGNAL TO NOISE RATIO	60dB	60dB	60dB
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω, 100V	4Ω, 8Ω, 16Ω, 100V	4Ω, 8Ω, 16Ω, 100V
PROTECTIONS			
COOLING	Auto Cooling	Auto Cooling	Auto Cooling
FREQUENCY RESPONSE	50-15,000Hz	50-15,000Hz	100-12,000Hz
POWER SUPPLY	220~240V, 50/60Hz , DC:12V (12V Car Battery)	220~240V, 50/60Hz, DC:12V (12V Car Battery)	220~240V, 50/60Hz, DC:12V (12V Car Battery)
DIMENSIONS	W380 x H125 x D280mm	W305 x H120 x D260mm	W250 x H95 x D245mm
WEIGHT	8.80 KG	6.20 KG	4.5 KG

MOBILE PA AMPLIFIER

MA-300USB

- 1 Mic & 1 Aux Input. With built-in Digital Player & Bluetooth Connectivity.
- Tone Control.
- 12V Car Battery Operation.
- 3 Tone Siren (Ambulance, Police, Fire) with volume control.
- Recommended for use with Penza Audio Horn Speakers SUH-15 / SUH 40XT.
- Amplifier mounting bracket supplied.
- Ideal for Police Vehicles, Crowd Control, Ambulances Publicity Vans, Electioneering etc.



PA-400 SM

- 2 Mic & 1 Aux Input.
- 12V Car Battery Operation.
- Two Tone Siren (Wailing & Yelping) with volume control.
- Recommended for use with Penza Audio Horn Speaker PH-15S / PH-30S.
- Amplifier mounting bracket supplied.
- Ideal for Police Vehicles, Crowd Control, Ambulances, Publicity Vans, Electioneering etc.



MODEL NO.	MA-300USB	PA-400 SM
POWER OUTPUT	40 W MAX. 30 W RMS.	50 W MAX. 40 W RMS.
TONE CONTROL	SIREN	SIREN
INPUT CHANNELS	1 x Mic 0.8mV/ 4.7kΩ, 1 x AUX 100mV/ 470KΩ	2 x Mic 0.8mV/ 4.7kΩ, 1 x AUX 100mV/ 470KΩ
DIGITAL PLAYER	MP3 Player with USB, SD Card, BT connectivity	
SIGNAL TO NOISE RATIO	60dB	60dB
SPEAKER OUTPUTS	4Ω, 8Ω, 16Ω	4Ω, 100V
PROTECTIONS		
COOLING	Auto Cooling	Auto Cooling
FREQUENCY RESPONSE	100-10,000Hz	100-10,000Hz
POWER SUPPLY	DC:12V Car Battery	DC:12V Car Battery
DIMENSIONS	W180 x H80 x D240mm	W180 x H80 x D240mm
WEIGHT	1.50 KG	2.00 KG

MIXERS



Mixers & Processors Engineered for Precision. Built for Performance. PENZA AUDIO mixers are designed to deliver effortless control of multi-microphone systems, ensuring exceptional audio clarity and reliable performance even in the most demanding professional environments. From compact portable mixers for mobile applications to advanced digital consoles for concerts, auditoriums, live events, and large-scale productions, PENZA AUDIO offers a comprehensive range of mixing solutions engineered for superior sound quality, precision, and long-lasting reliability.



PA SYSTEM



AUDITORIUM




STAGE SHOWS




BIG EVENTS

Concerts | Auditoriums | Live Shows | DJs
Houses of Worship | Conference Halls
Educational Institutions | Recording Studios




MIXERS

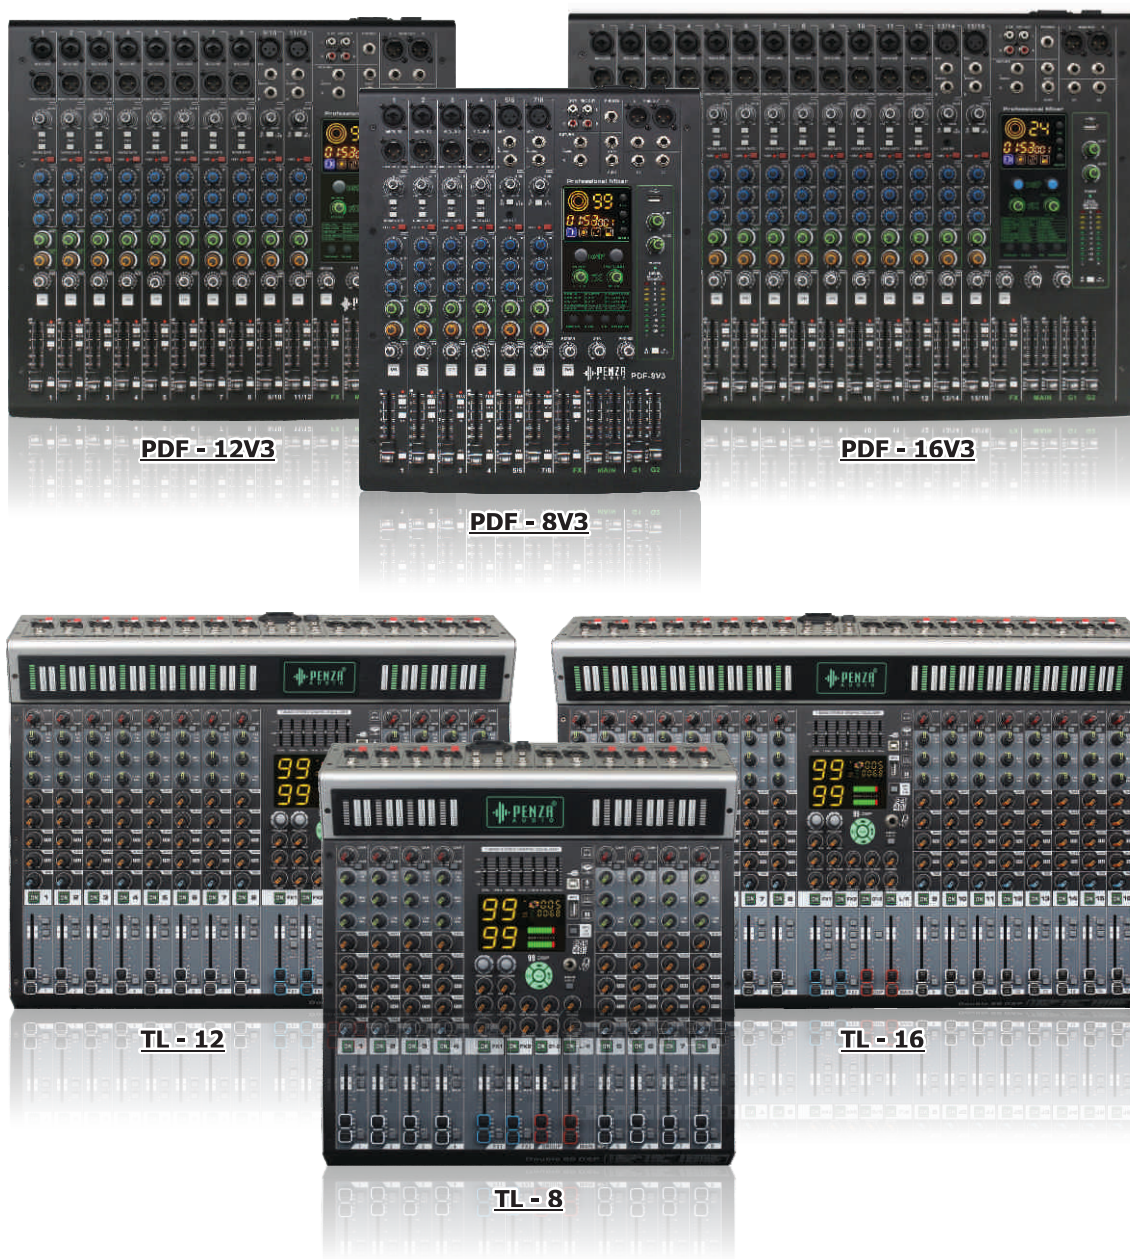

MODEL NO.	PDF-8V3	PDF-12V3	PDF-16V3	TL-8	TL-12	TL-16
Line Channel	8	12	16	8	12	16
MIC	6	10	14	8	12	16
Stereo	2	2	2	2	2	2
Group Buses	2	2	2	3	3	3
Channel EQ	3	3	3	7	7	7
Effects	99	99	99	99 DSP	99 DSP	99 DSP
AUX	2	2	2	4	4	4
MP3 Player	✓	✓	✓	✓	✓	✓
Bluetooth Display	✓	✓	✓	✓	✓	✓
USB Recording	✓	✓	✓	✓	✓	✓
+ 48 Phantom Power	✓	✓	✓	✓	✓	✓
Fader	60 mm.	60 mm.	60 mm.	60 mm.	60 mm.	60 mm.
Dimension L*W*H	325x420x110 mm.	435x420x110 mm.	545x420x110 mm.	325x435x110 mm.	435x435x110 mm.	545x435x110 mm.
Weight N.W	4.3 Kg.	5.6 Kg.	6.5 Kg.	4.9 Kg.	6.3 Kg.	7.7 Kg.

MIXERS

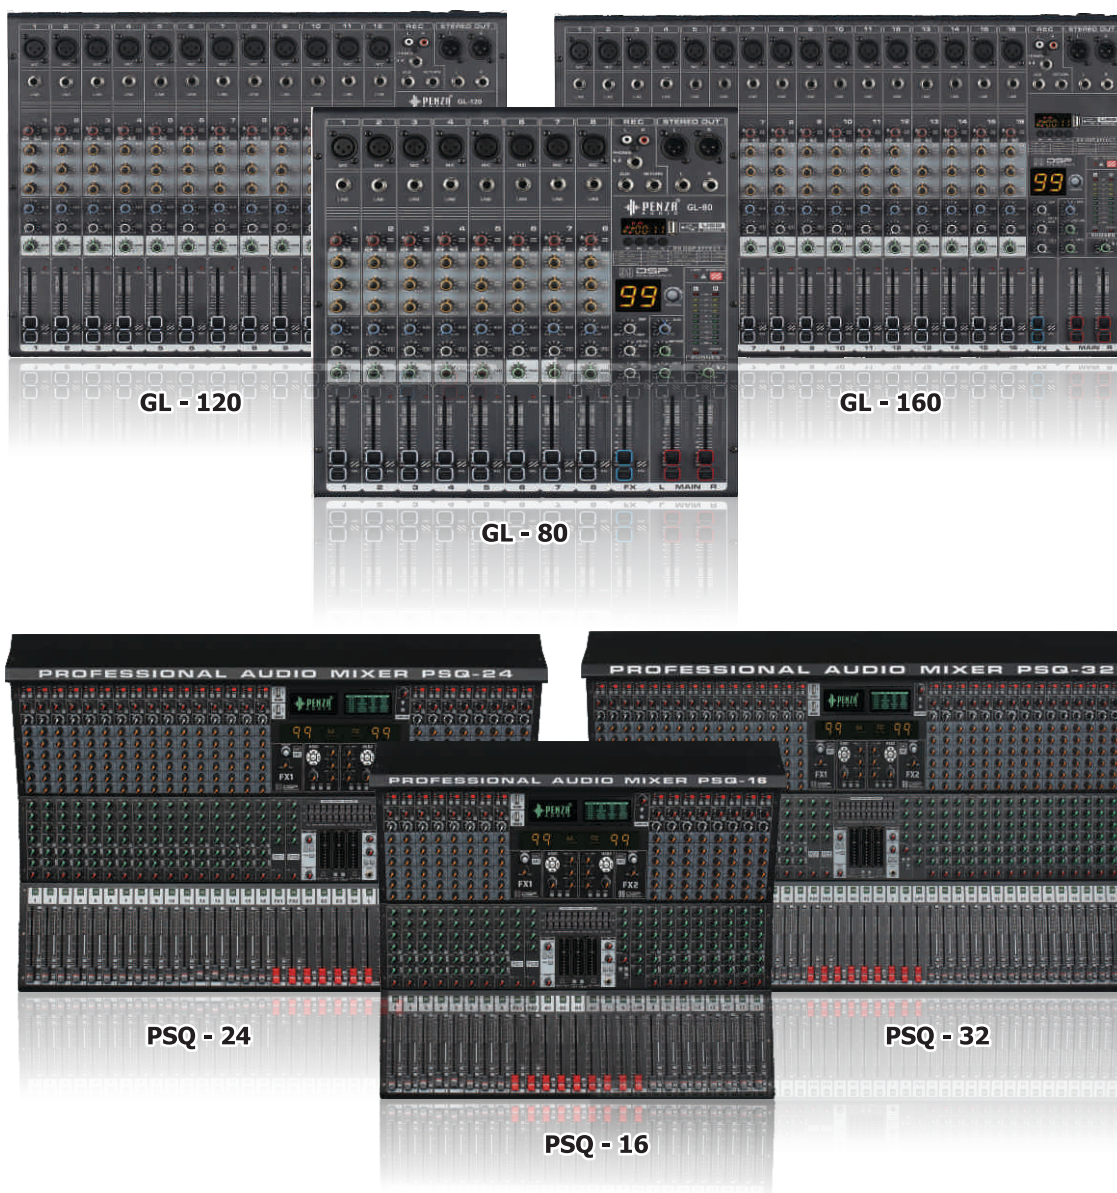

MODEL NO.	GL-80	GL-120	GL-160	PSQ16	PSQ-24	PSQ-32
Line Channel	8	12	16	16	24	32
MIC	8	12	16	16	24	32
Channel EQ	3	3	3	6	6	6
Effects	99	99	99	99 DUAL DSP	99 DUAL DSP	99 DUAL DSP
AUX	1	1	1	6	6	6
MP3 Player	✓	✓	✓	✓ X 2	✓ X 2	✓ X 2
Bluetooth Display	✓	✓	✓	✓	✓	✓
USB Recording	✓	✓	✓	✓ X 2	✓ X 2	✓ X 2
+ 48 Phantom Power	✓	✓	✓	✓	✓	✓
Fader	60 mm.	60 mm.	60 mm.	100 mm.	100 mm.	100 mm.
Dimension L*W*H	400x370x95 mm.	515x370x95 mm.	630x370x95 mm.	703X560X205 mm.	920x560x205 mm.	1135x560x205 mm.
Weight N.W	4.2 Kg.	5.3 Kg.	7.3 Kg.	14.15 Kg.	18 Kg.	21.85 Kg.

MIXERS



MODEL NO.	STUDIO - 24	MODEL NO.	GERMAN - 6R
Line Channel	24	Line Channel	6
MIC	20	MIC	5
Group Buses	2	Stereo	1
Channel EQ	4	Channel EQ	3
Stereo EQ	DUAL 7 BAND	Stereo EQ	3
Effects	24 DSP	Effects	1
AUX	3	MP3 Player	✓
MP3 Player	✓	Bluetooth Display	✓
Bluetooth Display	✓	USB Recording	✓
USB Recording	✓	Dimension L*W*H	220X235X65 mm.
+ 48 Phantom Power	✓	Weight N.W	1.8 Kg.
Fader	100 mm.		
Dimension L*W*H	755x460x145 mm.		
Weight N.W	12.3 Kg.		

MIXERS



MIX - 06



MIX - 08



EQ - 60



EQ - 80

MODEL NO.	MIX-06	MIX-08	MODEL NO.	EQ-60	EQ-80
Line Channel	6	8	Line Channel	6	8
MIC	6	8	MIC	2	4
Channel EQ	3	3	Stereo	2	2
Effects	99	99	Channel EQ	3	3
AUX	2	2	Effects	99	99
MP3 Player	✓	✓	AUX	2	2
Bluetooth Display	✓	✓	MP3 Player	✓	✓
USB Recording	✓	✓	Bluetooth Display	✓	✓
+ 48 Phantom Power	✓	✓	USB Recording	✓	✓
Fader	60 mm.	60 mm.	+ 48 Phantom Power	✓	✓
Dimension L*W*H	315x295x70 mm.	315x295x70 mm.	Fader	60 mm.	60 mm.
Weight N.W	2.35 Kg.	2.6 Kg.	Dimension L*W*H	255x245x95 mm.	330x245x95 mm.
			Weight N.W	1.6 Kg.	2 Kg.

MICROPHONE



Microphones are the first & Most visible part in most of the Big Events. Penza Audio Offers a wide range of microphones. Penza strives to produce products of unmatched quality, reliability, and durability. Its qualified team is not only made of superb engineers, but also of performers, artists, presenters, and listeners. When looking for the best microphone for any particular purpose, a PENZA microphone is a sure contender.



House Parties



Places of Worship




Interviews



Public Meetings

Public Meetings | Interviews | Mobile Announcements
Car Paging | Celebrations | Karaoke | Singing
House Parties | Places of Worship.



PROFESSIONAL WIRED MICROPHONE

PZ 600

DYNAMIC VOCAL MICROPHONE

- Frequency response optimized for vocals.
- Clear voice reproduction.
- Powerful band sound.
- Minimized handling noise and structure-borne noise, low susceptibility to acoustic feedback.
- High-quality reed switch allows silent switching actions.
- Supplied with connection cable.
- Ideal use for singing and vocal programs

PZ 286

The PZ-286 Dynamic cardioid live Microphone, equipped with the most popular capsule provides excellent performance for lead and backup vocals, and instrument miking at a moderate price and is comparable in sound quality to many microphones costing much more.

The magnetic reed type On/Off switch provides silent switching and can also be placed into a locked position to prevent accidental or unwanted tampering. The internal pneumatic shock mount system assures low handling noise whether used in a handheld application or when placed on a microphone stand.

P 8

Professional microphone for live vocal, music instruments, studio recording and broadcasting. Superior double shock-mount system and noiseless switch. Exceptionally warm and articulate sound. Supplied with quick detachable holder with 3-pin professional XLR connector and 10m twin core shielded low noise cable.

PENZA BETA 58A

Vocal microphone provides a brightened midrange and bass roll-off with frequency response to control proximity effect, a steel mesh grille for durability, a shock mount for low unwanted noise, and a neodymium magnet for high signal-to-noise ratio



PROFESSIONAL WIRED MICROPHONE

PZ 280

Highly sensitive microphone picks up even weak sound from longer distance and wider area. Noiseless magnetic reed switch. Suitable for Dramas, Stage shows Group singing & Church choir. Smooth frequency response.

Supplied with quick detachable holder with 3-pin professional XLR connector and 6m twin core shielded low noise cable

PZ 100

Premium microphone for the most demanding high-end applications. Superb shock mount system of the cartridge Noiseless magnetic reed switch. Ideal for all Vocal and PA application. Supplied with quick detachable holder with 3-pin professional XLR connector & 6m twin core shielded low noise cable. Penza PZ 100 is specially designed with upgraded kit to ensure the quality of sound, mainly used in all vocal programs.

YX 2

Premium microphone for the most demanding high-end applications. Superb shock mount system of the cartridge Noiseless magnetic reed switch. Ideal for all Vocal and PA application. Supplied with quick detachable holder with 3-pin professional XLR connector & 6m twin core shielded low noise cable. Great performance PA microphone for live vocal & music. Hardened grille with anti-roll rubber ring. Supplied with quick detachable holder with 3-pin professional XLR connector

YX 4

Premium microphone for the most demanding high-end applications. Superb shock mount system of the cartridge Noiseless magnetic reed switch. Ideal for all Vocal and PA application. Supplied with quick detachable holder with 3-pin professional XLR connector & 6m twin core shielded low noise cable. Professional microphone for live vocal, music instruments, studio recording & broadcasting. Superior double shock-mount system and noiseless switch. Exceptionally warm and articulate sound. Supplied with quick detachable holder with 3-pin professional XLR connector & 10 mtrs. twin core shielded low noise cable.



PROFESSIONAL WIRED MICROPHONE

SHADOW - 100

Highly sensitive microphone picks up even weak sound from longer distance and wider area. Noiseless magnetic reed switch. Suitable for Dramas, Stage shows Group singing & Church choir. Smooth frequency response.

Supplied with quick detachable holder with 3-pin professional XLR connector and 6m twin core shielded low noise cable

AQUA - 99

Highly sensitive microphone picks up even weak sound from longer distance and wider area. Noiseless magnetic reed switch. Suitable for Dramas, Stage shows Group singing & Church choir. Smooth frequency response.

Supplied with quick detachable holder with 3-pin professional XLR connector and 6m twin core shielded low noise cable

PZ - 57A BETA

Vocal microphone provides a brightened midrange and bass roll-off with frequency response to control proximity effect, a steel mesh grille for durability, a shock mount for low unwanted noise, and a neodymium magnet for high signal-to-noise ratio

ALEXA - Z3

Highly sensitive microphone picks up even weak sound from longer distance and wider area. Noiseless magnetic reed switch. Suitable for Dramas, Stage shows Group singing & Church choir. Smooth frequency response.

Supplied with quick detachable holder with 3-pin professional XLR connector and 6m twin core shielded low noise cable



PROFESSIONAL TABLE TOP PODIUM MIC.

**KA - 320****KA - 330 / PCM96****MA - 620 / GMB 21****TABLETOP - 101****TABLETOP - 202**

PROFESSIONAL WIRELESS MICROPHONE



ST-968

- Elegant & affordable high performance dual channel UHF wireless microphone available in different frequencies.
- 400 ft. Operating Range, tested in stadiums.
- Sturdy table-top dual channel receiver with frequency display.
- Separate volume control for both channels on the front panel of the receiver.
- Two handheld dynamic transmitters, each operating on 2 x 1.5V AA pencil cells.
- Separate balanced audio output from each channel through XLR connector and an unbalanced mixed output through 6.3mm (1/4") jack socket available.
- Receiver operates on 12V DC through an AC adaptor supplied along with the transmitter.
- Ideal for: PA Applications... Stage & Auditorium... Stadiums... Seminar Halls... Places of Worship... Recreation Centre...
- Packed in Waterproof briefcase with all accessories.

PROFESSIONAL WIRELESS MICROPHONE



PWM - 999
Dual Hand UHF Mic.



DV - 8000
Dual Hand UHF Mic.



PWM - 222
Dual Hand VHF Mic.



CV - 9000
Dual Hand VHF Mic.



CV - 9000 V1
Single Hand VHF Mic.



PTM - 100
Single Hand VHF Mic.



PTM - 360
Dual Hand VHF Mic.



PWM - 955
One Hand + One Collar VHF Mic.



PCL - 580
One Collar UHF Mic.



PCL - 980
One Collar UHF Digital Mic.

SPEAKERS



Penza Audio have a wide selection of speakers, so you can choose the products that best meet your unique needs. People commonly use speakers to get a better audio experience while listening to music or using for PA and DJ programs.

PENZA Speakers are famous for its crisp and balanced sound, which meets the Quality of sound in addressing the crowd or playing in a DJ Concert. It is a masterpiece producing a loud and powerful sound. Products recommended by DJ operators. Approach your next event with something big, bold & Upgraded with Penza Audio Speaker system.



Airport



Stadium




DJ Events



Fair & Exhibitions

Airport | DJs Events | Stadiums | Fair & Exhibitions
Defence Installations | Bus Terminal | Announcements
Schools | Colleges | Place of Worship.



PROFESSIONAL PA SPEAKERS

PZ12-200

RATED POWER	200W
MAX POWER	400W
NOMINAL DIAMETER	12"
SENSITIVITY	97dB
VOICE COIL DIAMETER	2.0"
MAGNET SIZE	155 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45Hz
WEIGHT	4.35 KG



PA-250

RATED POWER	250W
MAX POWER	500W
NOMINAL DIAMETER	12"
SENSITIVITY	97dB
VOICE COIL DIAMETER	2.0"
MAGNET SIZE	156 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45Hz
WEIGHT	4 KG



PZ-12-300

RATED POWER	150W
MAX POWER	300W
NOMINAL DIAMETER	12"
SENSITIVITY	96.2dB
VOICE COIL DIAMETER	2.0"
MAGNET SIZE	155 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	59.6Hz-3.2 KHz
WEIGHT	4.5 KG



PXA-300

RATED POWER	300W
MAX POWER	600W
NOMINAL DIAMETER	12"
SENSITIVITY	96.2dB
VOICE COIL DIAMETER	2.5"
MAGNET SIZE	156 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	59.6Hz-3.2 KHz
WEIGHT	4.25 KG



PROFESSIONAL PA SPEAKERS

PZ 12HF-07A

RATED POWER	300W
MAX POWER	600W
NOMINAL DIAMETER	12"
SENSITIVITY	96DB
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	5.83 KG



BC-1265

RATED POWER	350W
MAX POWER	700W
NOMINAL DIAMETER	12"
SENSITIVITY	96.2dB
VOICE COIL DIAMETER	2.5"
MAGNET SIZE	165 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	59.6Hz-3.2 KHz
WEIGHT	4.60 KG



HS-1265

RATED POWER	350W
MAX POWER	700W
NOMINAL DIAMETER	12"
SENSITIVITY	96dB
VOICE COIL DIAMETER	2.5"
MAGNET SIZE	165 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	68Hz-18KHz
WEIGHT	4.30 KG



PZ12-400B

RATED POWER	400W
MAX POWER	600W
NOMINAL DIAMETER	12"
SENSITIVITY	96.2dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	170 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	59.6Hz-3.2 KHz
WEIGHT	3 KG



PROFESSIONAL PA SPEAKERS

BC-1280

RATED POWER	500W
MAX POWER	1000W
NOMINAL DIAMETER	12"
SENSITIVITY	96DB
VOICE COIL DIAMETER	2.5"
MAGNET SIZE	185 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	5.83 KG



RX-500

RATED POWER	500W
MAX POWER	1000W
NOMINAL DIAMETER	12"
SENSITIVITY	96.2dB
VOICE COIL DIAMETER	3.0"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	59.6Hz-3.2 KHz
WEIGHT	7.35 KG



LION-600

RATED POWER	600W
MAX POWER	900W
NOMINAL DIAMETER	12"
SENSITIVITY	96dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	68Hz-18KHz
WEIGHT	4.48 KG



PM-15R 450-A

RATED POWER	450W
MAX POWER	900W
NOMINAL DIAMETER	15"
SENSITIVITY	96.2dB
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	59.6Hz-3.2 KHz
WEIGHT	6.53 KG



PROFESSIONAL PA SPEAKERS

F1575

RATED POWER	450W
MAX POWER	900W
NOMINAL DIAMETER	15"
SENSITIVITY	97db
VOICE COIL DIAMETER	3" In / Out
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	38Hz-3.0KHz
WEIGHT	7.45 KG



BC1575-A

RATED POWER	450W
MAX POWER	900W
NOMINAL DIAMETER	15"
SENSITIVITY	97db
VOICE COIL DIAMETER	3" In / Out
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	42Hz-4.2KHz
WEIGHT	7.14 KG



BC-1580

RATED POWER	500W
MAX POWER	1000W
NOMINAL DIAMETER	15"
SENSITIVITY	96dB
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	68Hz-18KHz
WEIGHT	7.51 KG



PZ15H 92-A

RATED POWER	450W
MAX POWER	900W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	48 Hz.
WEIGHT	7.10 KG



PROFESSIONAL PA SPEAKERS

PZ-15BM 500-V3

RATED POWER	500W
MAX POWER	1000W
NOMINAL DIAMETER	15"
SENSITIVITY	96db
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	55Hz-3.0KHz
WEIGHT	7.32 KG



PZ15-550

RATED POWER	550W
MAX POWER	900W
NOMINAL DIAMETER	15"
SENSITIVITY	97db
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	42Hz-4.2KHz
WEIGHT	7.14 KG




PZ-15 86B

RATED POWER	500W
MAX POWER	1000W
NOMINAL DIAMETER	15"
SENSITIVITY	96dB
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	68Hz-18KHz
WEIGHT	7.43 KG



PZ15-100G

RATED POWER	800W
MAX POWER	1600W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	48 Hz.
WEIGHT	10.90 KG

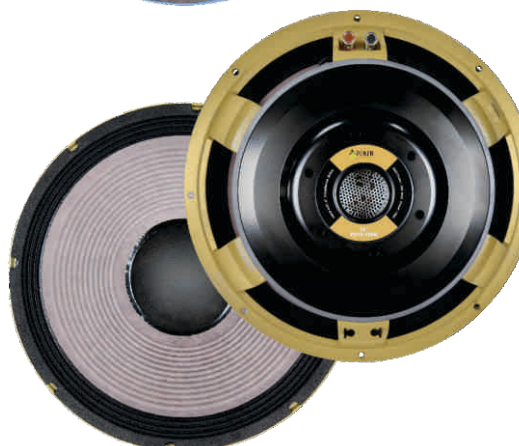

PROFESSIONAL PA SPEAKERS

MB15X-351

RATED POWER	700W
MAX POWER	1400W
NOMINAL DIAMETER	15"
SENSITIVITY	97.4 dB
VOICE COIL DIAMETER	3.5" In / Out
MAGNET SIZE	200 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	39Hz-3. 7KHz
WEIGHT	7.86 KG



LTW 15P-01

RATED POWER	650W
MAX POWER	1300W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	3"
MAGNET SIZE	190 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	55Hz.
WEIGHT	9.29 KG



PZ15 TBX-100

RATED POWER	750W
MAX POWER	1500W
NOMINAL DIAMETER	15"
SENSITIVITY	96dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	11.65 KG



PZ15-1000Y

RATED POWER	1000W
MAX POWER	2000W
NOMINAL DIAMETER	15"
SENSITIVITY	96dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	13.30 KG



PROFESSIONAL PA SPEAKERS

PM15R-100

RATED POWER	1000W
MAX POWER	2000W
NOMINAL DIAMETER	15"
SENSITIVITY	97.4 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	200 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	39Hz-3.7KHz
WEIGHT	9.35 KG



PZ 15-2

RATED POWER	1000W
MAX POWER	2000W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	10.57 KG



PZ15-3

RATED POWER	1000W
MAX POWER	2000W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	11.17 KG



PZ15H-85C

RATED POWER	600W
MAX POWER	1000W
NOMINAL DIAMETER	15"
SENSITIVITY	95.4 dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	55 Hz.
WEIGHT	9.5 KG



PROFESSIONAL PA SPEAKERS

PZ15H-95C

RATED POWER	1000W
MAX POWER	1500W
NOMINAL DIAMETER	15"
SENSITIVITY	97.4 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	200 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	39Hz-3.7KHz
WEIGHT	10 KG



RX-1200

RATED POWER	1200W
MAX POWER	2400W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	10.57 KG



LF 15W-100

RATED POWER	1200W
MAX POWER	2400W
NOMINAL DIAMETER	15"
SENSITIVITY	95.0 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	35.4Hz-1.6KHz
WEIGHT	11.58 KG



PZ15PD-1500G

RATED POWER	1500W
MAX POWER	3000W
NOMINAL DIAMETER	15"
SENSITIVITY	95.4 dB.
VOICE COIL DIAMETER	4.5
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	55 Hz.
WEIGHT	15.50 KG



PROFESSIONAL PA SPEAKERS

15 PST-1500

RATED POWER	1500W
MAX POWER	3000W
NOMINAL DIAMETER	15"
SENSITIVITY	97.4 dB
VOICE COIL DIAMETER	4.5"
MAGNET SIZE	253 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	39Hz-3. 7KHz
WEIGHT	14 KG



15 PST-1600

RATED POWER	1600W
MAX POWER	3200W
NOMINAL DIAMETER	15"
SENSITIVITY	98dB.
VOICE COIL DIAMETER	4.5"
MAGNET SIZE	233 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	15 KG



PTZ 15-1800

RATED POWER	1800W
MAX POWER	2600W
NOMINAL DIAMETER	15"
SENSITIVITY	95.0 dB
VOICE COIL DIAMETER	4.5"
MAGNET SIZE	233 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	35.4Hz-1.6KHz
WEIGHT	17 KG



PM15R-1800

RATED POWER	1800W
MAX POWER	2600W
NOMINAL DIAMETER	15"
SENSITIVITY	95.4 dB.
VOICE COIL DIAMETER	4.5
MAGNET SIZE	233 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	55 Hz.
WEIGHT	17 KG



PROFESSIONAL PA SPEAKERS

BC 18R-600

RATED POWER	1200W
MAX POWER	2400W
NOMINAL DIAMETER	18"
SENSITIVITY	98 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	73 Hz.
WEIGHT	12.00 KG



HS18W 100-2

RATED POWER	1600W
MAX POWER	3200W
NOMINAL DIAMETER	18"
SENSITIVITY	98 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	75 Hz.
WEIGHT	12.88 KG



PZ 18HF-018A

RATED POWER	1000W
MAX POWER	2000W
NOMINAL DIAMETER	15"
SENSITIVITY	98.0 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45Hz
WEIGHT	11.81 KG



PZ 18P-300A

RATED POWER	1200W
MAX POWER	2400W
NOMINAL DIAMETER	18"
SENSITIVITY	96dB.
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	75 Hz.
WEIGHT	11 KG



PROFESSIONAL PA SPEAKERS

LF18X451

RATED POWER	1800W
MAX POWER	3600W
NOMINAL DIAMETER	18"
SENSITIVITY	96 dB
VOICE COIL DIAMETER	4.5" In / Out
MAGNET SIZE	256 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	32Hz-2. 8KHz
WEIGHT	16.00 KG



HS 18W 100-2-4

RATED POWER	1600W
MAX POWER	3200W
NOMINAL DIAMETER	18"
SENSITIVITY	96 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	256 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	32Hz-2. 8KHz
WEIGHT	16.00 KG



PZ 18H-60C

RATED POWER	2000W
MAX POWER	4000W
NOMINAL DIAMETER	18"
SENSITIVITY	98 dB
VOICE COIL DIAMETER	5"
MAGNET SIZE	280 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45 Hz
WEIGHT	19.00 KG



PZ-1850

RATED POWER	2000W
MAX POWER	4000W
NOMINAL DIAMETER	18"
SENSITIVITY	98 dB
VOICE COIL DIAMETER	5"
MAGNET SIZE	280 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	48 Hz
WEIGHT	18.88 KG



PROFESSIONAL PA SPEAKERS

PZ18-510

RATED POWER	2250W
MAX POWER	4500W
NOMINAL DIAMETER	18"
SENSITIVITY	96 dB
VOICE COIL DIAMETER	5"
MAGNET SIZE	256 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	32Hz-2.8KHz
WEIGHT	19.20 KG



PTZ18-2500

RATED POWER	2500W
MAX POWER	5000W
NOMINAL DIAMETER	18"
SENSITIVITY	96 dB
VOICE COIL DIAMETER	6"
MAGNET SIZE	256 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	32Hz-2.8KHz
WEIGHT	36.00 KG



PD18W-3000A

RATED POWER	3000W
MAX POWER	6000W
NOMINAL DIAMETER	18"
SENSITIVITY	98 dB
VOICE COIL DIAMETER	6"
MAGNET SIZE	280 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45 Hz
WEIGHT	26.35 KG



PZ18H-93C

RATED POWER	3200W
MAX POWER	6400W
NOMINAL DIAMETER	18"
SENSITIVITY	98 dB
VOICE COIL DIAMETER	6"
MAGNET SIZE	280 mm
MAGNET TYPE	FERRITE
FREQUENCY RANGE	48 Hz
WEIGHT	34 KG



PROFESSIONAL PA SPEAKERS



PZ 18H-74-C

MODEL	PZ 18-H 74-C	PZ 18-H 83-C
RATED POWER	2400W	3200W
MAX POWER	4800W	6400W
NOMINAL DIAMETER	18"	18"
SENSITIVITY	96.0 dB	96.0 dB
VOICE COIL DIAMETER	6"	6"
MAGNET SIZE	330 mm	330 mm
MAGNET TYPE	FERRITE	FERRITE
FREQUENCY RANGE	52.8 Hz.	65 Hz.
WEIGHT	25.00 KG	31.00 KG



PZ 18H-83-C

PROFESSIONAL PA SPEAKERS



PD 18W2000

MODEL	PD 18W2000	PD 18W2200
RATED POWER	2000W	2200W
MAX POWER	4000W	4400W
NOMINAL DIAMETER	18"	18"
SENSITIVITY	95.0 dB	95.0 dB
VOICE COIL DIAMETER	5"	6"
MAGNET SIZE	280 MM	330 MM
MAGNET TYPE	FERRITE	FERRITE
FREQUENCY RANGE	36.8Hz-2.1KHz	47.8Hz-1.5KHz
WEIGHT	18.87 KG	21.00 KG



PD18W2200

PROFESSIONAL PA SPEAKERS

LF15R100-8

RATED POWER	1200W
MAX POWER	2400W
NOMINAL DIAMETER	15"
SENSITIVITY	95.4 dB
VOICE COIL DIAMETER	4"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45Hz-1.7KHz
WEIGHT	26.20 KG



PZ18HF-047A

RATED POWER	2000W
MAX POWER	4000W
NOMINAL DIAMETER	18"
SENSITIVITY	96dB.
VOICE COIL DIAMETER	5"
MAGNET SIZE	280 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	40.30 KG



PD 21W-3000A

RATED POWER	3000W
MAX POWER	4000W
NOMINAL DIAMETER	21"
SENSITIVITY	95.4 dB
VOICE COIL DIAMETER	6"
MAGNET SIZE	220 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	45Hz-1.7KHz
WEIGHT	42 KG



PZ 21-612

RATED POWER	3200W
MAX POWER	4000W
NOMINAL DIAMETER	21"
SENSITIVITY	96dB.
VOICE COIL DIAMETER	6"
MAGNET SIZE	280 MM
MAGNET TYPE	FERRITE
FREQUENCY RANGE	65 Hz.
WEIGHT	44 KG



TWEETERS

TY-2501-A

- A small format diaphragm compression driver designed for mid-range and extended high-frequency applications in two way professional sound reinforcement systems.
- The driver has a rated bandwidth of 1.5kHz to beyond 20kHz.
- This features an industry-standard screw-on style exit that allows the driver to easily mate to any high-frequency horn with a standard 1-inch screw-on mounting.



BC 455-A

- A 1.70 inch (44 mm) medium format diaphragm compression driver coupled to a high-density magnetic circuit. The compression driver exit diameter is an industry-standard 1 inch (25.4mm).
- The phase plug is a circumferential slot design that has been redesigned to provide both extended band width and superior response linearity.
- The magnetic circuit and phase plug geometry is an integrated design that yields an excellent combination of both mechanical and acoustical conversion efficiencies.



HS75-8

- A state of the art high output compression driver. New developments Penza Audio Research and Development have produced new levels of performance.
- A small format titanium based diaphragm assembly mated to close spaced circumferential phase plug geometry.
- This small-format throat and small format diaphragm insures wide dispersion at very high frequencies and is an excellent choice for three-way systems or medium power two-way designs.



PZ-4608

- A small format diaphragm compression driver designed for mid-range and extended high-frequency applications in two way professional sound reinforcement systems.
- The driver has a rated bandwidth of 1.5kHz to beyond 20kHz.
- This features an industry-standard screw-on style exit that allows the driver to easily mate to any high-frequency horn with a standard 1-inch screw-on mounting.



MODEL NO.	TY-2501-A	BC 455-A	HS75-8	PZ-4608
MAX POWER	40W	180W	120W	120W
VOICE COIL DIAMETER	24.5 MM	44 mm	44 MM	44 mm
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω	8Ω
SENSITIVITY	106 dB.	98dB	97dB	104dB
FREQUENCY RANGE	20 Hz.	900-2kHz	1.2k-20kHz	1-20kHz

TWEETERS

TY 4401-A

- A state of the art high output compression driver. Advanced engineering and manufacturing methods have produced an extremely reliable and wide bandwidth device that also features very high fidelity.
- This medium format throat insures low distortion and high intelligibility and is an industry standard for professional audio applications. This throat diameter has become an industry reference when combined low distortion and extended bandwidth are required.



PZ 44-2

- A 1.70 inch (44 mm) medium format diaphragm compression driver coupled to a high-density magnetic circuit. The compression driver exit diameter is an industry-standard 1 inch (25.4mm).
- The phase plug is a circumferential slot design that has been redesigned to provide both extended band width and superior response linearity.
- The magnetic circuit and phase plug geometry is an integrated design that yields an excellent combination of both mechanical and acoustical conversion efficiencies.



HP75-8

- A 1.70 inch (44 mm) medium format diaphragm compression driver coupled to a high-density magnetic circuit. The compression driver exit diameter is an industry-standard 1 inch (25.4mm).
- The phase plug is a circumferential slot design that has been redesigned to provide both extended band width and superior response linearity.
- The magnetic circuit and phase plug geometry is an integrated design that yields an excellent combination of both mechanical and acoustical conversion efficiencies.



PZ440-J2

- A 1.70 inch (44 mm) medium format diaphragm compression driver coupled to a high-density magnetic circuit. The compression driver exit diameter is an industry-standard 1 inch (25.4mm).
- The phase plug is a circumferential slot design that has been redesigned to provide both extended band width and superior response linearity.
- The magnetic circuit and phase plug geometry is an integrated design that yields an excellent combination of both mechanical and acoustical conversion efficiencies.



MODEL NO.	TY 4401-A	PZ 44-2	HP75-8	PZ440-J2
MAX POWER	80W	180W	120W	90W
VOICE COIL DIAMETER	44 mm	44 mm	170 mm	44 mm
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω	8Ω
SENSITIVITY	99dB	98dB	95dB	98dB
FREQUENCY RANGE	1.3kHz-18kHz	900-2kHz	900-2kHz	900-2kHz

TWEETERS

PR450

- A large-format compression driver that utilizes a precision formed diaphragm assembly.
- The titanium diaphragm is precision formed to insure excellent consistency and performance.
- The construction yields a full 110 watts of power handling capacity.
- The larger diaphragm diameter (3 inches) provides superior mid band response and is an excellent choice for medium power professional sound reinforcement systems.



HD4401

- A large-format compression driver that utilizes a precision formed diaphragm assembly.
- The titanium diaphragm is precision formed to insure excellent consistency and performance.
- The construction yields a full 110 watts of power handling capacity.
- The larger diaphragm diameter (3 inches) provides superior mid band response and is an excellent choice for medium power professional sound reinforcement systems.



HS-51/PZ51A

- These high-frequency wired tweeters are typically made of lightweight materials like silk, aluminum, or titanium to ensure a fast & accurate response time.
- A high-frequency treble speaker is designed to reproduce high-frequency sound waves in DJ speakers, or audio systems used in DJ setups.
- The tweeter's main purpose is to reproduce the upper frequencies of a sound signal, such as cymbals, high-pitched vocals, & amp; strings, which are often difficult for larger speakers to reproduce accurately.
- DJ HF tweeters typically have a high-frequency range, usually starting around 2 kHz or higher, and can go up to 20 kHz or beyond.



PZ170-76

- A large-format compression driver that utilizes a precision formed diaphragm assembly.
- The titanium diaphragm is precision formed to insure excellent consistency and performance.
- The construction yields a full 110 watts of power handling capacity.
- The larger diaphragm diameter (3 inches) provides superior mid band response and is an excellent choice for medium power professional sound reinforcement systems.




MODEL NO.	PR450	HD4401	HS-51/PZ51A	PZ170-76
MAX POWER	100W	80W	120W	220W
VOICE COIL DIAMETER	44 mm	44 mm	51 mm	170 mm
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω	8Ω
SENSITIVITY	99dB	99dB	98dB	95dB
FREQUENCY RANGE	1.3kHz-18kHz	1.3kHz-18kHz	1.1kHz-18kHz	600-16kHz

PA CABINET LOUDSPEAKERS



◀ **LP-6 / LG-6** An aesthetically superior Loudspeaker that combines two 12" Full Range Dual Cone speakers and a Piezo Horn Tweeter. It delivers the fidelity of sound and the column effect for sound coverage demanded in sound reinforcement and PA applications. The system is housed in a Rugged Trapezoidal Bass Reflex Enclosure made of 18mm board, and covered with water based sprayPaint. Fully protected by front grille, ergonomically designed handles for easy portability.


PZ-6 / PZ-8 / PZ-10 An elegant and reliable Loudspeaker comprising of a single 6", 8", 10" Inch Full Range to Dual Cone speaker and a Piezo Horn Tweeter. The system is capable of handling 100W continuous power with undistorted response and is ideal for small PA applications. The speakers are housed in a trapezoidal closed box enclosure made of 18mm board, and carpet covered. Fully protected by front grille. Ergonomically designed handles for easy portability. Stand mount adaptor is provided at the bottom.

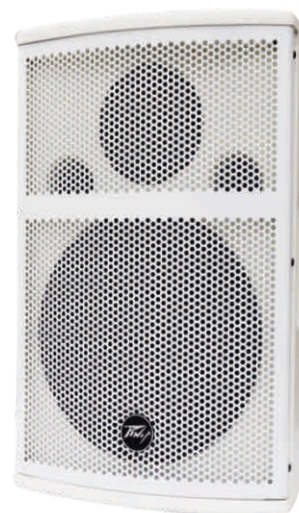

◀ **KP610/612/615** 10 / 12 / 15 Inch 2-Way Full Range Loudspeaker System. The KP Series uses a 254 mm Differential Drive woofer and a 37.5 mm annular polymer diaphragm, neodymium compression driver for 300 to 350 watts power capacity. 80° x 70° coverage pattern provides smooth, even coverage whether used in the vertical or horizontal orientation. The high-slope passive network minimizes band overlap. Differential Drive woofer for high-power capacity and very lightweight. 1.5" annular polymer diaphragm compression driver. Enclosure constructed of 15 mm plywood with rugged durable painting. 80° x 70° coverage pattern for even and smooth response on and off axis.

MODEL NO.	LP-6/LG-6	PZ-6 / 8 / 10	KP-610 / 612 / 615
POWER RATING	200W RMS / 400W MAX	100W / 150W / 200W RMS	450W / 450W / 450 RMS
CONFIGURATION	One Way	Two Way	Two Way
LOW FREQUENCY SPEAKER	2 x 6"	1 x 6" / 8" / 10"	1 x 10" / 12" / 15"
HIGH FREQUENCY UNIT	Not Available	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA CABINET LOUDSPEAKERS

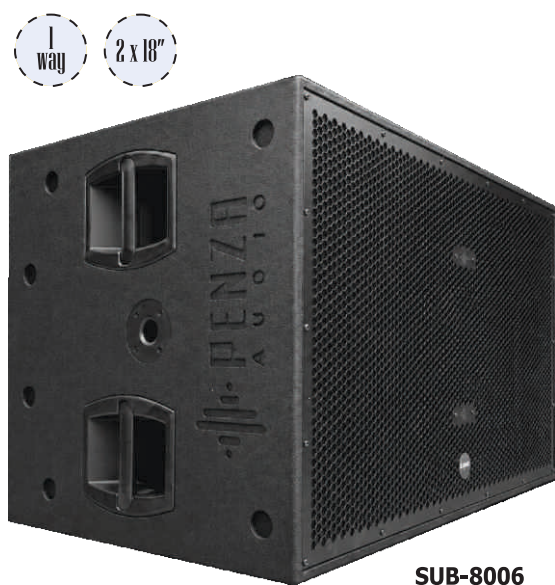

MODEL NO.	HDL-20A	SUB-8006	SUB-8004
POWER RATING	1400W RMS / 2800W MAX	2400W RMS / 4800W MAX	1200W RMS / 2400W MAX
CONFIGURATION	Two Way	One Way	One Way
LOW FREQUENCY SPEAKER	2 x 12"	2 x 18"	1 x 18"
HIGH FREQUENCY UNIT	Available	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA CABINET LOUDSPEAKERS



◀ **LP-212** An aesthetically superior Loudspeaker that combines two 12" Full Range Dual Cone speakers and a Piezo Horn Tweeter. It delivers the fidelity of sound and the column effect for sound coverage demanded in sound reinforcement and PA applications. The system is housed in a Rugged Trapezoidal Bass Reflex Enclosure made of 18mm board, and covered with water based spray Paint. Fully protected by front grille, ergonomically designed handles for easy portability.

2
way
2 x 12"

SRX-715 15" High-Power Two-Way Loudspeaker. Light-weight and very high-power. 75°x 50°coverage. Bi-amplified or full-range passive operation. Flying version available (SRX715) with five suspension points. Differential Drive woofer with Ferrite magnet for high power capacity and very light-weight. 3 in. (voice-coil) compression driver with Ferrite magnet.



2
way
1 x 15"




◀ **VRX-932** 12 inch Two-Way Powered Line Array Loudspeaker System The VRX932 is a powered, lightweight, compact 12" two-way line-array speaker system designed for use in arrays of up to five units. VRX932 is the ideal choice when line-array performance is needed but the venue size doesn't call for the very long-throw characteristics of larger line-arrays and a fast and easy setup is vital.

2
way
1 x 12"

MODEL NO.	LP-212	SRX-715	VRX-932
POWER RATING	600W RMS / 1200W MAX	400W RMS / 800W MAX	800W RMS / 1600W MAX
CONFIGURATION	Two Way	Two Way	Two Way
LOW FREQUENCY SPEAKER	2 x 12"	1 x 15"	1 x 12"
HIGH FREQUENCY UNIT	Available	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA CABINET LOUDSPEAKERS

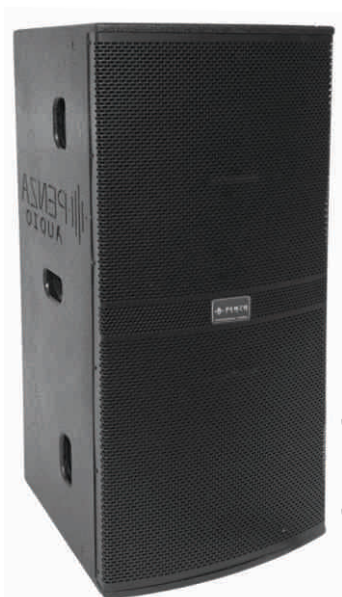


2 way

2 x 15"

HD-215 Professional 2-way Loudspeaker with exceptional efficiency, long throw and unmatched intelligibility of sound. It consists of two 15" high performance full range dual cone speakers and a High frequency compression driver. The speaker system is housed in an acoustically treated Bass Reflex Trapezoidal with durable paint finish enclosure. The cabinet has been fitted with heavy-duty handles to allow ease of transportation and a strong steel grille for speaker protection. Ideal for both indoor and outdoor sound reinforcement applications. Specially designed for Auditoriums and DJs.

STX-815 15" Two-way Stage Monitor/utility Speaker. Premium passive loudspeaker system. Very high power handling. 70° x 70° coverage. Bi-amplified or full-range passive operation. Vented Gap Cooled woofer for high power capacity. 3" (voice-coil) compression driver with Ferrite magnet.

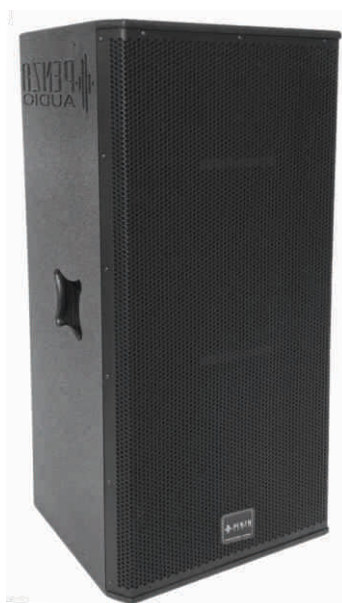

2 way

2 x 15"



2 way

1 x 15"

MRX-625 Specially designed for DJ Competition & Live programs with superb high power professional 2-Way PA Loudspeaker in attractive painted enclosure. Packed with two high powers 15" LF loudspeakers and a high frequency titanium compression horn driver give very well defined, prominent lows and brilliant highs. Acoustically treated bass reflex trapezoidal cabinet with a strong steel grille ensures protection and durability. Heavy duty wooden handles allow ease of mobility and transportation. Ideal for use Speakers with high powered amplifiers for a variety of indoor and outdoor applications like Auditoria, DJs, Live Performances etc.

MODEL NO.	HD-215	STX-815	MRX-625
POWER RATING	800W RMS / 1600W MAX	500W RMS / 1000W MAX	800W RMS / 1600W MAX
CONFIGURATION	Two Way	Two Way	Two Way
LOW FREQUENCY SPEAKER	2 x 15"	1 x 15"	2 x 15"
HIGH FREQUENCY UNIT	Available	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA CABINET LOUDSPEAKERS



2
way

2 x 15"


◀ **SRX-725** Dual 15" High-Power Two-Way Loudspeaker. For the ultimate in performance and simplicity, a pair of SRX725 speakers, and a single, high-power amplifier delivers superb high-level music and powerful bass. Light-weight and very high-power. Dual 380 mm (15 in.) Differential Drive low-frequency drivers for extended low-frequency output. 102 mm (3 in) voice-coil ferrite compression driver for high-power capacity and very lightweight. 75°x 50° coverage. Bi-amplified or full-range passive operation.



2
way

2 x 15"

STX-825 Dual 15" High-Power Two-Way Loudspeaker. Compact and very high-power. Dual (15") Vented Gap Cooling low-frequency drivers for very high acoustic output. 102 mm (3 in) voice-coil ferrite compression driver for high-power capacity and very light-weight. 90°x 50° coverage. Bi-amplified or full-range passive operation. Rugged Dura Flex coated enclosures sized to be truck pack friendly. 14-Gauge steel grille lined with acoustically transparent cloth.

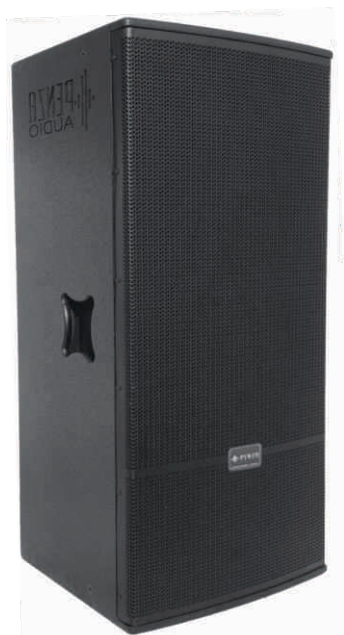

2
way

2 x 15"

◀ **CV-2570** Outstanding professional 2-Way PA Loudspeaker with continuous power handling capacity. Two high power 15" LF loudspeakers and a high frequency titanium compression horn driver give very well defined, prominent lows and brilliant highs. Acoustically treated bass reflex trapezoidal Painted cabinet with a strong steel grille ensures protection and durability. Heavy duty wooden handles allow ease of mobility and transportation. Ideal for use with high powered amplifiers for large gatherings.

MODEL NO.	SRX-725S	STX-825	CV-2570
POWER RATING	1100W RMS / 2200W MAX	1200W RMS / 2400W MAX	1200W RMS / 2400W MAX
CONFIGURATION	Two Way	Two Way	Two Way
LOW FREQUENCY SPEAKER	2 x 15"	2 x 15"	2 x 15"
HIGH FREQUENCY UNIT	Available	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA CABINET LOUDSPEAKERS



3
way
1 x 10"

◀ **CV-1052** Penza Audio DJ loudspeakers used in applications including sound reinforcement and stage monitoring in Houses of Worship, Events, Clubs, Rehearsal Halls, Ballrooms. BT Series delivers extraordinary performance at unmatched value. High SPL and sensitivity. 1x10" high power low frequency transducer. 1 x 3" titanium diaphragm compression driver. Driven by one amplifier. 60°X40° width direction to get more widely enlarge capability. Suitable for full sound field enlarge, club and DJ Events etc. publics using. Suitable for any big sound engineering project or enlarge, returning listen, repair listen of fluxion performance system.

PZ-2325 This is Professional 2-Way DJ Loudspeaker with excellent LF response, exceptional efficiency, long throw and unmatched intelligibility of sound. Two 15" high performance LF loudspeakers and a high frequency Titanium compression horn driver housed in an acoustically treated bass reflex trapezoidal black sand enclosure. Strong steel grille for speaker protection. Heavy duty wooden handles allow ease of mobility and transportation. Suitable for both indoor and outdoor sound reinforcement applications. Ideal for Auditoria..DJ.. Live.. Concerts.. Discos..Etc.



2
way
2 x 15"

2
way
2 x 15"



◀ **PZ-2380** Professional 2-Way PA Loudspeaker in attractive painted enclosure. Loaded with two highly efficient 15" low frequency speakers and a reliable high frequency titanium compression horn driver. Acoustically treated bass reflex cabinet is capable of producing excellent low frequency response together with impressive mid and high frequency response Strong steel grille ensures speaker protection and durability. Heavy duty wooden handles allow easy transportation. Ideal for use in a variety of indoor and outdoor sound reinforcement applications like Auditoria, DJs, Live Performances etc.

MODEL NO.	PENZA BT MODEL	PZ-2325	PZ-2380
POWER RATING	1300W RMS / 2600W MAX	1300W RMS / 2600W MAX	1300W RMS / 2600W MAX
CONFIGURATION	Two Way	Two Way	Two Way
LOW FREQUENCY SPEAKER	2 x 15"	2 x 15"	2 x 15"
HIGH FREQUENCY UNIT	Available	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA CABINET LOUDSPEAKERS



1 way

1 x 18"

SRX-718 18" High Power Subwoofer. The SRX-718S subwoofer's compact design is equally at home as a small, high-performance satellite subwoofer system or as a building block for larger subwoofer arrays. The SRX718S is a compact, high power subwoofer system containing a high power ferrite magnet, 18" woofer in a front-loaded, vented enclosure. The enclosure is designed to present a minimum frontal area. The system offers complete input connection flexibility for compatibility with a variety of cabling schemes.

PZ-3125 Superb high power professional 2-Way PA Loudspeaker in attractive painted enclosure. Packed with two high powers 15" LF loudspeakers and a high frequency titanium compression horn driver give very well defined, prominent lows and brilliant highs. Acoustically treated bass reflex trapezoidal cabinet with a strong steel grille ensures protection and durability. Heavy duty wooden handles allow ease of mobility and transportation. Ideal for use Speakers with high powered amplifiers for a variety of indoor and outdoor applications like Auditoria, DJs, and Live Performances etc.



1 way

1 x 18"

2 way


2 x 15"




LK-618 Transducer Type Unit - 1*18". Rms – 800 Watts. Impedance- 8 Ohms. Peak Power -1600watts. Sensitivity - 95db. Spl – 110db. Frequency Response - 26hz – 500khz. Weight - 45kg

MODEL NO.	SRX-718	PZ-3125	LK-618
POWER RATING	800W RMS / 1600W MAX	1200W RMS / 2400W MAX	600W RMS / 1200W MAX
CONFIGURATION	One Way	Two Way	One Way
LOW FREQUENCY SPEAKER	1 x 18"	2 x 15"	1 x 18"
HIGH FREQUENCY UNIT	Not Available	Available	Not Available
NOMINAL IMPEDANCE	8Ω	8Ω	8Ω

PA LINE ARRAY LOUDSPEAKERS

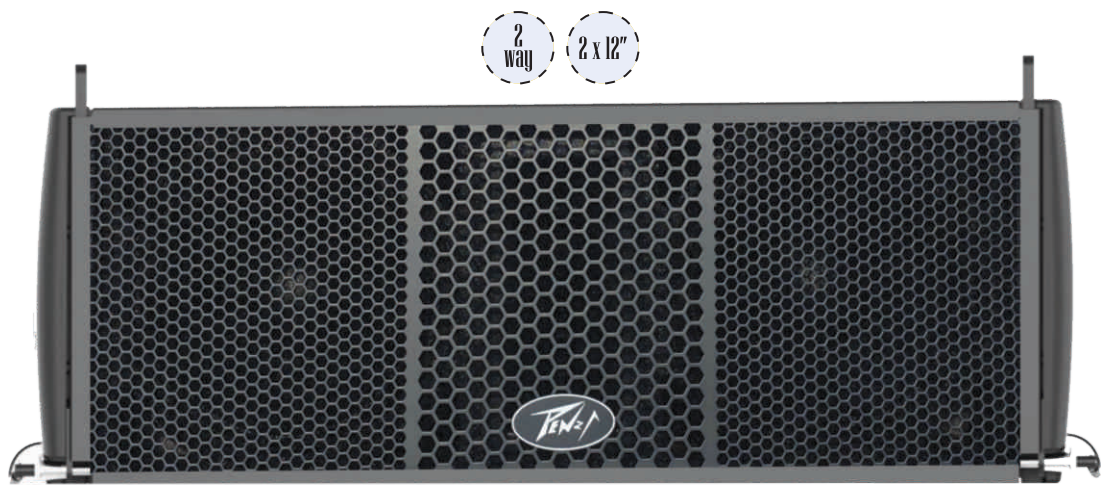

PZ-2100 is a high performance dual 30.48cm (12”) line array neodymium speaker system. Each module comprises of two powerful LF drivers and a high quality HF driver to deliver natural, intelligible and clear sound in a variety of music & speech applications. Each line array cabinet is designed to provide controlled & coherent coverage pattern with excellent high frequency response. Comprises of a powerful HF driver with a waveguide horn for constant curvature line array system

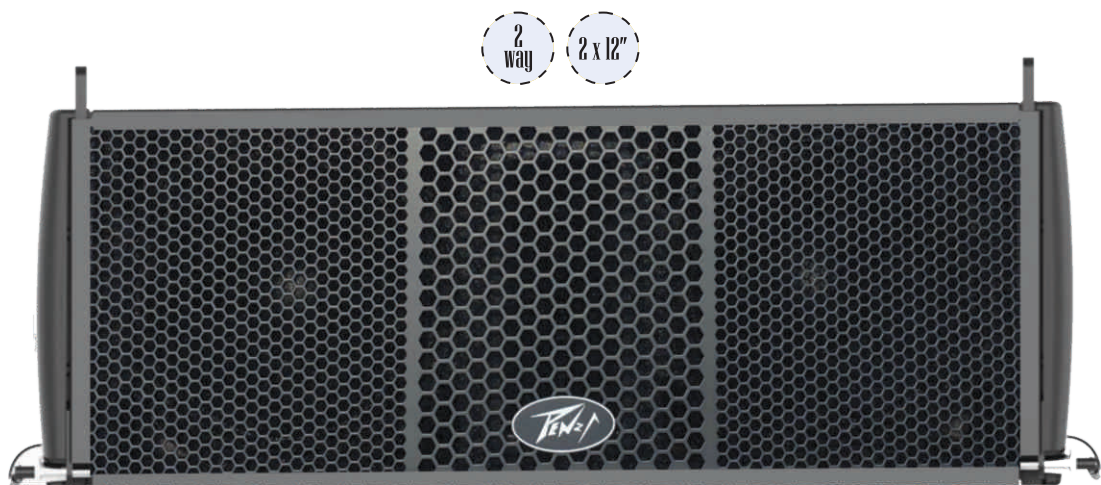

PZ-2120 Professional 2-way passive crossover network with dynamic HF protection. Strong, well braced & resonance free speaker cabinet in durable paint finish.Heavy duty steel grille with acoustically transparent foam to protect neodymium speakers from various adverse working conditions. Suitable for a wide variety of applications in Fixed Installations, Rental, Djs and Live Sound Reinforcement.

MODEL NO.	PZ-2100	PZ-2120
POWER RATING	600W RMS / 1200W MAX	800W RMS / 1600W MAX
CONFIGURATION	Two Way	Two Way
LOW FREQUENCY SPEAKER	2 x12"	2 x12"
HIGH FREQUENCY UNIT	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω

PA LINE ARRAY LOUDSPEAKERS



MONITOR-15R2P

MONITOR-12R2P



SUB-MS18

SUB-MS15

SUB-MS12

MODEL NO.	MONITOR-15R2-P / 12R2-P	SUB-MS18 / MS15 / MS12
POWER RATING	800W / 600W RMS	1500W / 800W / 800 W RMS
CONFIGURATION	Two Way	One Way
LOW FREQUENCY SPEAKER	1 x 15" / 1 X 12"	1 x 18" / 1 x 15" / 1 x 12"
HIGH FREQUENCY UNIT	Available	Available
NOMINAL IMPEDANCE	8Ω	8Ω

PA LINE ARRAY LOUDSPEAKERS



RED ROBO - 15

RED ROBO - 12

TW-216A (POWERED DUAL 15)



ELX-118

ELX-115

MODEL NO.	RED ROBO 15 /12	TW-216A (WITH WHEELS)	ELX-118 / 115
POWER RATING	1000W / 600W	2000 W	1000W / 700W
CONFIGURATION	Two Way	Two Way	One Way
LOW FREQUENCY SPEAKER	2 x 15" / 2 X 12" (with 450HF)	2 x 15" (Inbuilt Amplifier)	1 x 18" / 1 x 15"
HIGH FREQUENCY UNIT	Available	Available	Available
NOMINAL IMPEDANCE	4Ω	8Ω	8Ω

COLUMN SPEAKERS

PCO SERIES

For Indoor & Outdoor applications such as in Halls, Auditoria, Airport Lounges,
Array of speaker radiate forward sound beam for wider audience coverage,
Mounting clamps & hardware supplied.

- Slim, compact, aesthetically designed column speakers.
- Off-white colour to integrate with most interiors.
- Aluminum extruded cabinet with moulded plastic covers, metal mesh grille.
- 100V line matching transformer with rotary switch for tap selection.


100
volts

PCO 04

PCO 05

PCO 06

PCO 07

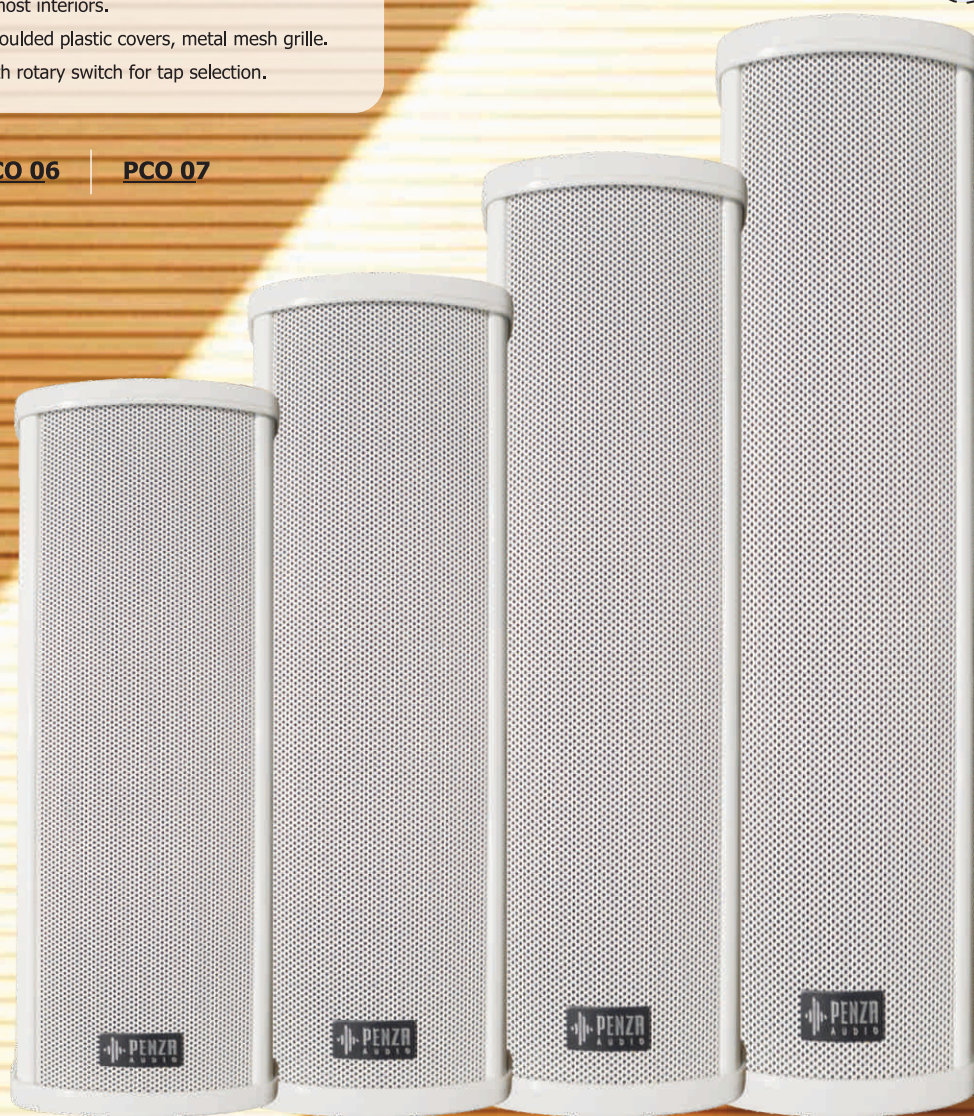

MODEL NO.	PCO-04	PCO-05	PCO-06	PCO-07
POWER	10 W	20 W	30 W	40W
SPEAKER SIZE	3" x 3	3" x 4	3" x 6	3" x 8
VOLTAGE	100 V	100 V	100 V	100 V
SENSIVITY	90dB	91dB	92dB	93dB
FREQUENCY RESPONSE	170-15kHz	170-15kHz	170-15kHz	170-15kHz
MATERIAL	ALUMINIUM	ALUMINIUM	ALUMINIUM	ALUMINIUM
DIMENSION	115 x 389 x 89	405 x 106 x 75	548 x 106 x 75	691 x 106 x 75
WEIGHT	1.90 KG	2 KG	2.8 KG	3.5 KG

WALL SPEAKERS

WALL MOUNT PROFESSIONAL SERIES

- For Indoor & Outdoor applications such as in Halls, Auditoria, Airport Lounges.
- Weather resistant -for use under roof eaves. Foam layer to protect speakers from dust.
- Array of speakers radiate forward sound beam for wider audience coverage.
- Mounting clamps & hardware supplied.
- Column speakers in metal cabinet in powder coated finish.
- Speaker connections through a terminal strip at the rear.
- Available in 100V line matching transformer version and low impedance version.



501G | 501G2 (WITH INBUILT AMPLIFIER)

MODEL NO.	501G	501G2
POWER	50 W	50 W
SPEAKER SIZE	5" x 1	5" x 2
VOLTAGE	100 V / 8Ω	100 V / 8Ω
SENSIVITY	92dB	92dB
FREQUENCY RESPONSE	150-10kHz	150-10kHz
MATERIAL	ABS BODY	ABS BODY
DIMENSION	182 x 162 x 242	182 x 162 x 242
WEIGHT	2.5 KG	2.5 KG

COLUMN SPEAKERS

PCM SERIES

- For Indoor & Outdoor applications such as in Halls, Auditoria, Airport Lounges.
- Weather resistant -for use under roof eaves. Foam layer to protect speakers from dust.
- Array of speakers radiate forward sound beam for wider audience coverage.
- Mounting clamps & hardware supplied.
- Column speakers in metal cabinet in powder coated finish.
- Speaker connections through a terminal strip at the rear.
- Available in 100V line matching transformer version and low impedance version.



PCM-10T | **PCM-15T**



MODEL NO.	PCM-10T	PCM-15T
POWER	10 W	15 W
SPEAKER SIZE	4" x 1	4" x 2
VOLTAGE	100 V / 8Ω	100 V / 8Ω
SENSIVITY	92dB	92dB
FREQUENCY RESPONSE	150-10kHz	150-10kHz
MATERIAL	ALUMINIUM	ALUMINIUM
DIMENSION	390 x 125 x 120	455 x 165 x 145
WEIGHT	1.20 KG	2.85 KG

WALL SPEAKERS



PW-0302S | **PW-0402S** | **PW-0502S** | **PW-0602S**



MODEL NO.	PW-0302S	PW-0402S	PW-0502S	PW-0602S
POWER	15W/10W/5W/2.5W/ 8Ω	20W/10W/5W/2.5W/ 8Ω	30W/15W/7.5W/3.75W/ 8Ω	40W/20W/10W/5W/ 8Ω
SPEAKER SIZE	1" Tweeter, 3" Woofer	1" Tweeter, 4" Woofer	1" Tweeter, 5" Woofer	1" Tweeter, 6" Woofer
VOLTAGE	70V/100V	70V/100V	70V/100V	70V/100V
SENSIVITY	88dB	89dB	89dB	89dB
FREQUENCY RESPONSE	100-20kHz	100-20kHz	100-20kHz	100-20kHz
MATERIAL	ABS	ABS	ABS	ABS
DIMENSION	130 x 115 x 197	170 x 150 x 215	182 x 162 x 242	215 x 190 x 284
WEIGHT	1.7 KG	2.2 KG	2.5 KG	3.5 KG



PW-2401S | **PW-2501S** | **PW-2601S** | **PW-2801S**



MODEL NO.	PW-2401S	PW-2501S	PW-2601S	PW-2801S
POWER	20W/10W/5W/2.5W/ 8Ω	30W/15W/7.5W/3.75W/ 8Ω	40W/20W/10W/5W/ 8Ω	60W/30W/15W/7.5W/ 8Ω
SPEAKER SIZE	1" Tweeter, 4" Woofer	1" Tweeter, 5" Woofer	1" Tweeter, 6" Woofer. High Efficiency	1" Tweeter, 8" Woofer. High Efficiency
VOLTAGE	70V/100V	70V/100V	70V/100V	70V/100V
SENSIVITY	87dB	88dB	90dB	90dB
FREQUENCY RESPONSE	90-20kHz	90-20kHz	80-20kHz	70-20kHz
MATERIAL	ABS	ABS	ABS	ABS
DIMENSION	220 x 150 x 135	255 x 178 x 155	310 x 213 x 195	417 x 289 x 255
WEIGHT	2.5 KG	3.1 KG	3.7 KG	6.6 KG

WALL SPEAKERS



PW-1603



POWER	10W/5W
SPEAKER SIZE	1" Tweeter, 6" Woofer
VOLTAGE	100 V
SENSIVITY	92dB
FREQUENCY RESPONSE	130-15kHz
MATERIAL	ABS
DIMENSION	260 x 185 x 120
WEIGHT	1.3 KG



PW-081



POWER	80W/40W/20W/10W/ 8Ω
SPEAKER SIZE	1" Tweeter, 8" Woofer
VOLTAGE	70V/100V
SENSIVITY	92dB
FREQUENCY RESPONSE	40-20kHz
MATERIAL	PP
DIMENSION	455 x 280 x 270
WEIGHT	7.7 KG



PJ-6308T



POWER	40W
SPEAKER SIZE	6" Projector Speaker
VOLTAGE	100 V
SENSIVITY	92dB
FREQUENCY RESPONSE	100-15kHz
MATERIAL	ABS
DIMENSION	170 x 245
WEIGHT	



PG-026



POWER	30 W
SPEAKER SIZE	6"
VOLTAGE	100 V
SENSIVITY	90dB
FREQUENCY RESPONSE	80-20kHz
MATERIAL	FRP
DIMENSION	260 x 245 x 290
WEIGHT	6 KG

CEILING SPEAKERS



PCE-803



PCE-705



PCE-60



PCE-204T



High power 1-way flush mount ceiling speaker for excellent reproduction of both speech and music. Penza ceiling speaker enables high frequencies to be directed wherever they are most required. operates on 100V line. Moulded plastic & metal frame with a mesh grill. PCE-803 is 3"woofer, PCE-204T is 4" woofer, PCE-705 is 5" woofer, PCE-60 is 6" woofer . 100V line operation with easy power tap selection through a terminal block.

MODEL NO.	PCE-803	PCE-705	PCE-60	PCE-204T
RMS POWER	6 W	6 W	6 W	20 W
SPEAKER SIZE	3"	5"	6"	4"
VOLTAGE	100 V	100 V	100 V	100 V
SENSIVITY	87dB	93dB	93dB	88dB
FREQUENCY RESPONSE	120-20kHz	100-15kHz	100-15kHz	100-20kHz
MATERIAL	IRON	ABS	ABS	ABS
DIMENSION	101 x 60	175 x 60	188 x 76	180 x 80
WEIGHT	0.4 KG	0.5 KG	0.7 KG	1.2 KG

CEILING SPEAKERS



Elegant, low profile ceiling speaker with clear, highly intelligible sound. Low profile appearance. 5", 6", 8" Full Range Speaker with power taps of 6W. 6 Watts continuous RMS power handling capacity. Easy mounting with spring loaded wing clamps. 100V operation with easy selection of power taps through a terminal block.

MODEL NO.	PCE-55T	PCE-56T	PCE-58T
RMS POWER	6 W	6 W	6 W
SPEAKER SIZE	5"	6"	8"
VOLTAGE	100 V	100 V	100 V
SENSIVITY	92dB	92dB	92dB
FREQUENCY RESPONSE	110-18kHz	100-18kHz	50-18kHz
MATERIAL	ABS	ABS	ABS
DIMENSION	203 x 80	230 x 80	270 x 85
WEIGHT	0.7 KG	0.9 KG	1.3 KG



Ceiling speaker with an elegant, aesthetically pleasing with Excellent sound quality combined with an ultra-modern low profile appearance makes this ideally suited for high-end offices, restaurants, bars, malls etc. Operates on 100V line with power taps of 40/20/10W. Moulded plastic frame with metal mesh grill. PCE-75T is 5" woofer, PCE-76T is 6"woofer, PCE-78T is 8" woofer. 100V line operation with easy power tap selection's through a terminal block.

MODEL NO.	PCE-75T	PCE-76T	PCE-78T
RMS POWER	10W/5W	15W/10W	20W/15W
SPEAKER SIZE	5" Coaxial Speaker	6" Coaxial Speaker	8" Coaxial Speaker
VOLTAGE	100 V	100 V	100 V
SENSIVITY	87dB	88dB	86dB
FREQUENCY RESPONSE	100-18kHz	92-18kHz	110-18kHz
MATERIAL	ABS	ABS	ABS
DIMENSION	203 x 80	230 x 90	270 x 105
WEIGHT	0.7 KG	0.8 KG	2.0 KG

CEILING SPEAKERS



High quality flush mount ceiling speaker with stylish grill and frame which integrates wonderfully well with all interiors. Clear and clean sound for speech and music 5"/6"/8" Full Range Speaker. Beautiful powder coated aluminum mesh grille and moulded plastic frame. 100V line operation with easy power tap selection through a terminal block. Superbly engineered for simple and a safe installations.

MODEL NO.	PCE-65T	PCE-66T	PCE-68T
RMS POWER	20W/10W/5W/2.5W	30W/15W/7.5W/3.75W	40W/20W/10W
SPEAKER SIZE	5" Coaxial Speaker	6" Coaxial Speaker	8" Coaxial Speaker
VOLTAGE	100 V	100 V	100 V
SENSIVITY	88dB	89dB	87dB
FREQUENCY RESPONSE	90-20kHz	80-20kHz	50-20kHz
MATERIAL	ABS	ABS	ABS
DIMENSION	203 x 80	230 x 90	270 x 105
WEIGHT	1.25 KG	1.6 KG	2.1 KG



High power 2-way flush mount ceiling speaker for excellent reproduction of both speech and music. It is having a excellent Tweeter system in-built in product. Amazing Dual cone speaker technology with Polypropylene cone. Tweeters can be tilted at an angle to focus clear, intelligible sound in the desired direction. Operates on 100V line with power taps of 20/30/40W. PCE-45T is 5" woofer, PCE-46T is 6" woofer, PCE-48T is 8" woofer. Very clean and wide frequency response. Molded plastic frame with a metal mesh grill. Stylish designed grill which integrate well with all interiors. 100V line operation with easy power tap selection through a terminal block.

MODEL NO.	PCE-45T	PCE-46T	PCE-48T
RMS POWER	20 W	30 W	40 W
SPEAKER SIZE	5"Dual Cone Speaker	6"Dual Cone Speaker	8"Dual Cone Speaker
VOLTAGE	100 V	100 V	100 V
SENSIVITY	87dB	87dB	87dB
FREQUENCY RESPONSE	100-20kHz	90-20kHz	50-20kHz
MATERIAL	ABS	ABS	ABS
DIMENSION	203 x 80	230 x 90	270 x 105
WEIGHT	1.25 KG	1.6 KG	2.1 KG

HORN SPEAKERS



SUH15 | **SUH40XT**



MODEL NO.	SUH15	SUH40XT
POWER	15W / 23 W MAX / 8Ω	40W / 60 W MAX / 8Ω
VOLTAGE	70V/100V	70V/100V
SENSIVITY	400-5kHz	400-5kHz
FREQUENCY RESPONSE	500 Meter	500 Meter
MATERIAL	ABS (UV PROTECTED)	ABS (UV PROTECTED)
DIMENSION	253 x 152 (L265 MM.)	400 x 200 (L422 MM.)
WEIGHT	1.5 KG	3.90 KG

PORTABLE SPEAKER



PENZA portable Bluetooth speakers are a great way to get good sound quality at an affordable price, and you'll find models available at a wide array of price points, so even budget-conscious shoppers can get good sound quality, it can bring more thump and rumble in the bass range, so you feel the energy in bass-heavy genres like EDM and hip-hop. It gets loud, too, with a good battery life that make you continue the party as long as you like. Penza also have a different portable systems to handle the crowd or PA applications.



Outdoor Parties



School Events




Traffic Police



Classrooms

School | Colleges | Outdoor Parties | Classrooms
Club & Community Centers | Tour Guides
Traffic Police | Public Announcements



PORTABLE CUBE

- **TWS SYSTEM**
- **Digital Microphones**
- **USB TF/FM**
- **Radio Remote**
- **Control Recording / MIC Priority**
- **Aux / Mic**
- **English Voice**
- **Bluetooth Connectivity**
- **Remote Control**



PE 10



PZ 205-J



PZ 208-J



PZ 2108-J

PORTABLE CUBE

- **TWS SYSTEM**
- **Two Digital Microphones**
- **USB TF/FM**
- **Radio Remote**
- **Control Recording / MIC Priority**
- **Aux / Mic**
- **English Voice**
- **Bluetooth Connectivity**
- **Remote Control**



PZ 12-14



PZ 800

PZ 1000

MEGAPHONE & LOUDHAILER

PM-196S



Vehicle Megaphone

- 500 Yard Range.
- Power Output 24 Watts.
- For Indoor/Outdoor Use.
- Adjustable Volume Control.
- Button Activated Siren Alarm Mode.
- Lightweight, Portable & Powerful.
- Use in all vehicle.



PM-619S



Mini Compact Megaphone

- 500 Yard Range.
- Power Output 30 Watts.
- For Indoor/Outdoor Use.
- Adjustable Volume Control.
- Button Activated Siren Alarm Mode.
- Lightweight, Portable & Powerful.



PML-60



Compact Battery Operated Megaphone

- Audio Projection Modes: Voice Talking & Siren Alert.
- Voice Mode: Amplifies Your Voice as Spoken into the Microphone.
- Siren Alert Mode: Amplifies an Emergency Tone Through the Megaphone Speaker.
- Ergonomic Pistol Grip and Light-Weight Chassis.
- Adjustable Volume Control.
- Power Saving OFF Switch
- For Indoor/Outdoor Use.

MODEL NO.	PM-196S	PM-619S	PML-60
FUNCTIONS	Talk / Siren / USB / TF Card / Record / Bluetooth		
BATTERY	No Battery	18650 / 1500 mAh - 3.7V Lithium Battery	18650 / 1500 mAh - 3.7V Lithium Battery
RECORDING TIME	350 Seconds	300 Seconds	300 Seconds
AUDIBLE RANGE	500 Meter	500 Meter	500 Meter
POWER SOURCE	12V-90V	DC: 5V	12V
POWER OUTPUT	24W	30W	20W
DIMENSION	150 x 170	125 x 200	125 x 200

MEGAPHONE & LOUDHAILER



PA Megaphone Speaker with Wired Microphone

- High-Powered Digital Megaphone.
- Compact & Portable PA Speaker.
- Wired Handheld Microphone for Voice Projection.
- Integrated Siren Alarm Function.
- Built-in Bluetooth for Wireless Music Streaming.
- MP3 Digital Audio File Playback.
- USB Flash & SD Memory Card Readers.
- Aux-Input (3.5mm) Jack.
- Connect & Stream Audio from External Devices.
- Adjustable Volume Control.
- Ergonomic, Light-Weight Pistol Grip Chassis.
- Perfect for Crowd Control & Public Gatherings.
- For Indoor/Outdoor Use.
- Used by U.S. Armed Forces.



PM-18B | **PM-80B** | **PM-8B**



MODEL NO.	PM-18 B	PM-80B / PM-8 B (BLU.)
FUNCTIONS	Talk / Siren / USB / TF Card / Record	Talk / Siren / USB / TF Card / Record / Bluetooth
BATTERY	1500 mAh Lithium Battery or 6 x 1.5V Size D	2200 mAh Lithium Battery or 8 Cells Size C
RECORDING TIME	350 Seconds	100 Seconds
AUDIBLE RANGE	800 Meter	1200 Meter
POWER SOURCE	12V	DC: 12V
POWER OUTPUT	50W	100W
DIMENSION	206 x 350	210 x 380

DJ LIGHT



PENZA brings to you a wide range of energy efficient lighting solutions , We are the Professional Manufacturer of DJ Lights and Importer, Wholesaler, Traders & Exporter in India for DJ Light, Beam Light, Led Par Lights, Laser Light, Smoke Machines etc. We have a wide range of products that include moving heads, LED PAR, DMX controller, Pearl 1024, mirror balls etc. Our lighting fixtures are used in a variety of applications, including entertainment, architecture and commercial settings.



Auditoriums



Hotel & Clubs




DJ Events



Wedding Celebration

Stage Programs | Auditoriums | Stadium | DJ Programs
Hotel | Wedding Celebrations.



PAR LIGHT

DA 88 / PZ 60

- Control channel
- Plastic Polymer body
- 7 DM x 512 ch.
- LED
- 60 x 3W 3in1
- Gross Weight 2 Kg. Approx.
- Option
- RGB
- CH1: Red | CH5: Dimmer | CH2: Green | CH6: Speed
- CH3: Blue | CH7: Master Dimmer | CH4: Strobe



DA 89 / PZ 007

- Control channel
- 8 DM x 512 Ch
- LED
- 54 x 3W RGB
- Gross weight
- 4 Kg. Approx.
- CH 1: Dimmer | CH 5: Red
- CH 2: Strobe | CH 6: Green
- CH 3: RGBW | CH 7: Blue
- CH 4: Mixing | CH 8: White



DA 66 / PZ 60 Heat Sink

- Control channel
- Metal body
- 7 DM x 512 ch.
- LED
- 60 x 3W 3in1
- Gross Weight 2 Kg. Approx.
- Option
- RGB
- CH1: Red | CH5: Dimmer | CH2: Green | CH6: Speed
- CH3: Blue | CH7: Master dimmer | CH4: Strobe



DA 888 / PZ 54

- Control channel
- 8 DM x 512 Ch
- LED
- 54 x 3W RGB
- Gross weight
- 4 Kg. Approx.
- CH 1: Dimmer | CH 5: Red
- CH 2: Strobe | CH 6: Green
- CH 3: RGBW | CH 7: Blue
- CH 4: Mixing | CH 8: White



BEAM LIGHT



13-R (295 BEAM) / 13-R MINI

115/230V 50/60 Hz.
Automatic power supply switching.
295W discharge lamp.
Type: MSD Platinum 20R.
Colour Temperature: 7,800 K.
Wheel with 6 HQ dichroic, indexable and.
Interchangeable rotating gobos (25.9mm).
Interchangeable and variable rotating wheel with 18+1 fixed.
Metal gobos.



20-R (380 BEAM)

115/230V 50/60 Hz.
Automatic power supply switching.
380W discharge lamp.
Type: MSD Platinum 20R.
Colour Temperature: 7,800 K.
Wheel with 6 HQ dichroic, indexable and.
Interchangeable rotating gobos (25.9mm).
Interchangeable and variable rotating wheel with 18+1 fixed.
Metal gobos.



15-R (350 BEAM)

115/230V 50/60 Hz.
Automatic power supply switching.
350W discharge lamp.
Type: MSD Platinum 20R.
Colour Temperature: 7,800 K.
Wheel with 6 HQ dichroic, indexable and.
Interchangeable rotating gobos (25.9mm).
Interchangeable and variable rotating wheel with 18+1 fixed.
Metal gobos.



24-R (420 BEAM)

115/230V 50/60 Hz.
Automatic power supply switching.
420W discharge lamp.
Type: MSD Platinum 24R.
Colour Temperature: 7,800 K.
Wheel with 6 HQ dichroic, indexable and.
Interchangeable rotating gobos (25.9mm).
Interchangeable and variable rotating wheel with 18+1 fixed.
Metal gobos.

DJ LIGHT



YC-030 (3 LEAVES RETRO FAN)



YC-030 (SHINY STAR FAN)



YC-032 (4 LEAVES RETRO FAN)




YC-032 (JEFF HARDY FAN)



YC-034 (MI BAR VERSION 1)



YC-034 (MI BAR VERSION 2)

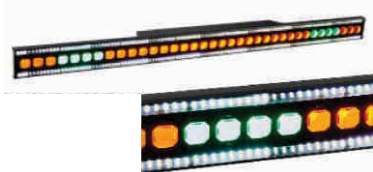

YC-034/GLBAR02 (VERSION 3)



YC-038 (4 EYES LASER)



YC-036 (2 EYES BLINDER)



YC-035 (4 EYES BLINDER)



GL-BD01 (2 EYES BLINDER / LED RING)



GL-RETRO 6 (4 EYES RETRO SHINING BAR)



GL RETRO 5 (ROTATION RETRO BLINDER)



GL RETRO 2 LED (2 EYES BLINDER)



STROBE 20 (RGB LIGHT)

DJ LIGHT



GL LED 24 (SUPER STROBE)



GLMH383 (6 HEAD MOVING)



GL BAR 11 (10X50 W)



GL BAR 10 (10 RGB LIGHT)



GL BAR 12 (6 PCS. RETRO LED)



GL MH 376 (6 ARM BEE EYES)



YC041 (5 WATT BLUETOOTH)



YC042 (10wATT BLUETOOTH)

SMOKE MACHINE



PM-1200SL



SM-1200

SMOKE MACHINE



SM 1500

Product Features: Size (cm) : 31.5 x 53.5 x 23.5, Control Mode : Wire Control And Remote Control, Weight : 9.5 Kg, Tank Capacity : 2 Ltr, Power Consumption : 1500 Watts, Voltage : AC 110V/220V. Trusted quality for best performance.


LIGHT CONTROLLER



MINI PEARL 1024-B

512/1990 standard maximum 1024 control channels, photo electric isolation signal output L control 96 largest amount of dimming or 96 road, use pearl lamp base. Built-in graphic trajectory generator, there are 135 built-in graphics, convenient for user to graphics trajectory control of amount, picturesque, spiral, rainbow, chasing, and other effects. Graphic parameters (amplitude, speed, interval, wave, direction) can be set independently. LI console has a function writing lamp library. L 60 repeat scenario, a A multi-step scenario is used to store and single-step scenario. multi-step scenario can store up to 600. steps

LIGHT CONTROLLER

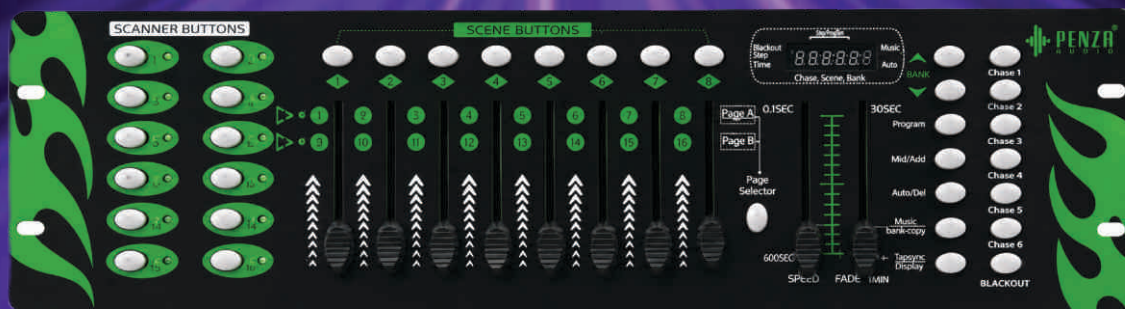

DMX V3

Penza DMX 512 This item is a standard universal stage light controller, controlling up to 192 DMX channels. It is specially designed to control multiple light effects at once effortlessly. This is the perfect balance among cost, ease of use and remarkable features. It is perfect for those who really want to take advantage of their lighting and effects. Great for DJ's, school concerts, or any regular party. With a DMX controller you'll be able to customize lighting effects to perfectly suit your parties atmosphere and sound



PILOT 2000 V3

Universal Pilot 2000 controller is able to control upto 40 units. Each unit with maximum of 36 channels. Total of 512 DMX Channels. Able to control dimmer pack with a maximum of 192 channels 40 programs or chases, m chases, presets each program chase. Able to use 4 programs, 4 chases, 4m chases, 4 presets at the same time

MIRROR BALL



The Penza Audio Imported Mirror Ball is an indispensable accessory for creating dynamic light shows with myriad spots of light spinning around the room in clubs, private events, weddings, and more.

With 100s of Reflective Mini Panels.

Motor Loop on Top.

The motor is intended for indoor use.

For DJ's, Clubs, Weddings, and Private Events

Sizes : 12" | 16" | 18" | 20" | 24" | 28"

ACCESSORIES



Penza audio have the best Accessories & spares for DJ & PA Products. We have the controller for DJ lights to use in big events to get the effects on light and Processors for DJ speaker to refine their sound quality as the DJ operator needed the voice to outcome.



Volume Controller




Speaker Wire



PA Stand




Horn & Trumpet



PENZA CABLES


In PENZA we realize that whether you're playing live, recording, rehearsing with the band, or just practicing at home, a bad cable can distract you from your best performance. PENZA understands that the best cables are the ones you never have to think about. Created by working musicians, PENZA uses premium connectors and conductors, along with a detailed assembly process to ensure that your cable will perform flawlessly every time you plug it in. There will be no humming voice in your sound system by using Penza Wires & Cables.

TC 01




6.35 mm to 3.5mm cable **1.5M**

TV 204



3.5 mm to 2RCA Audio Cable **1.5M**

TV 202



3.5 mm to 2RCA Audio Cable **1.5M**

TB 22




6.35mm to 6.35mm cable **1M**

TB 96




6.35mm to 6.35mm cable **1M**

TB 35A




6.35mm to 6.35mm cable **3M**

X 73




6.35mm to 6.35mm cable **5M**

TB 19



XLR Female to XLR Male cable **1M, 2M, 20M**

TF 33



XLR Female to XLR Male cable **1M**

TB 17



6.35mm to XLR Female Cable **20M**

TK 29 B










6.35mm to XLR Female Cable **5M, 10M**

TB 98



6.35mm to 6.35mm cable **1M**

PENZA CABLES

TK 473.5mm to RCA Cable **1.5M****TK 36**6.35mm to 6.35mm cable **10M****TV 205**2RCA to Two 6.35 Audio Cable **1.5M, 3M, 5M****TV 215**3.5 mm to Two 6.35 Audio Cable **1.5M****TB 95**6.35mm to 6.35mm cable **3.0M****TA 07**XLR Female to XLR Male cable **1M****TC 03**6.35 mm to 3.5mm cable **3M****TF 16**6.35mm to 6.35mm cable **1.5M****YN 250 / YN 251**Jack to Type C Audio Cable **1.5M / 3M****HD 216**HDMI 4K **5, 10, 15, 20 M****YN 338 / 339**Dual Jack to Jack **3.0M****YN 133**Type C to AUX Port **87MM.**


PENZA CABLES

PZ SPEAKER WIRE - 01




Dual Core speaker wire 40/76 BLACK **91M**

PZ SPEAKER WIRE - 03

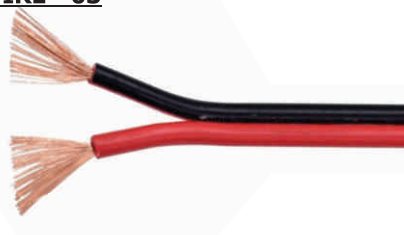

Dual Core speaker wire 70/76 BLACK **91M**

PZ SPEAKER WIRE 02

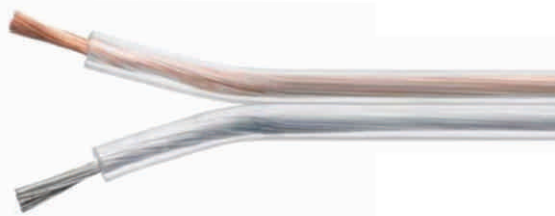

Dual Core speaker wire 40/76 TRANSPARENT **91M**

PZ SPEAKER WIRE 03 S




Dual Core speaker wire 70/76 SPECIAL HEAVY DUTY BLACK **91M**

YC 210




Dual Core speaker wire **100M**

PZ SPEAKER WIRE 05

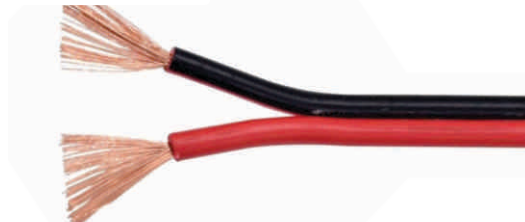

Tinned copper speaker wire 100/76 SPECIAL HEAVY DUTY BLACK **91M**

PZ MIC WIRE

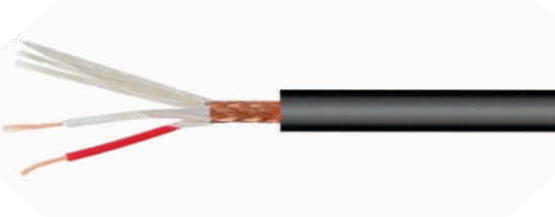

Dual core Mic wire 19/40 **91M**

PZ BLACK



Pure copper speaker wire 100/76 **91M**

SOCKETS

Audio systems should perfectly reproduce music. Penza Sockets are essential for audio systems to do so. They have to connect the parts of an audio system transparently: to add nothing to the music but also not to subtract anything from it. PENZA cable & Sockets are globally renowned for the high-end audio cables it develops, designs and produces that help achieve this purpose. We do this on the basis of decades of research, true craftsmanship and most importantly our passion for music. So that you do not only hear what the artist intended you to hear, but also feel what the artist intended you to feel. Penza Sockets & Connectors have a different technology with Zero percent humming problem with unbreakable voice.

KR 04



Speakon Plug

KR 07



Speakon Plug

SP 10



Speakon plug High-quality

KR 10



Sharpy Display Power Plug

KC 31



XLR Male

KD 31



XLR Female

KC 13



XLR Male

KD 13



XLR Female

KD 35



XLR Female

KB 89



6.35mm Jack

KW 10



Sharpy socket

SK 10



Speaker Socket

PROCESSORS

FB 4.0 / 6.0

4/6 channel anti-howling digital feedback suppression processor designed for live sound and DJ setups to eliminate microphone squeals and whistling in real time. 4/6 independent input and output channels for multi-microphone management. Automatic digital signal processing (DSP) to scan and cut feedback frequencies instantly. Clear vocal output without tone distortion or robotic artifacts.

XPL M

Inputs : DC balanced. Impedance 30KS2Outputs:Unbalanced. Impedance 1000Crossover frequency, fixed:140Hz and 1400Hz.Gain control range:Off at CCW, unity at centerand +12dB (4 times) at CW.Frequency response +/- 3dB:20Hz to 30Khz, (With bass eq defeated)THD:Less than 0.005%.Power requirement:180 to 240VAC,5 VA.

XPL 3.1 F

Inputs : DC balanced. Impedance 30KQ.Outputs:Servo balanced using dedicated Ics. Impedance 500.Frequency control rangeLow to Mid, 55Hz to 160Hz.Mid to HI.550 Hz to 1600Hz.Gain control range:Off at CCW, unity at centerand +12dB (4 times) at CWFrequency response+/-3dB:20Hz to 30Khz, (With bass eq defeated)THD:Less than 0.002%Power requirement:200 to 240VAC,7 VA

FBX 360 / DB 260

FBX 360 : Proactively detects and eliminates microphone or system-level squealing/howling using sharp, automatic notch filters. Proactively detects and eliminates microphone or system-level squealing/howling using sharp, automatic notch filters.DB 260 provides full bandpass and crossover configurations as well as independent output processing and a full time RTA for live sound applications.

PJ 2300X

Penza Audio PJ 2300X Crossover (DJ Equipment) Good quality material. Products are highly demanded for features like durability, high performance, easy to operate, perfect finish, long functional life and low maintenance. Good Quality product.Easy To UseLong Life products. Voltage-240V Frequency-50 hz Automation Grade-AutomaticControl-Manual, Knobs Color - lack Features - CONTAINS LATEST DIGITAL CIRCUIT Usage/Application- Musical & DJ Events.

PA 20+

Penza Audio PA 20+ Distributor Amp. (DJ Equipment) Good quality material. Products are highly demanded for features like durability, high performance, easy to operate, perfect finish, long functional life and low maintenance. Good Quality product.Easy To UseLong Life products. Voltage-240V Frequency-50 hz Automation Grade-AutomaticControl-Manual, Knobs Color - lack Features - CONTAINS LATEST DIGITAL CIRCUIT Usage/Application- Musical & DJ Events.



DRIVER UNITS

Penza Driver Units are weatherproof and are made of rugged construction to withstand vibration and damage. The Aluminum Die-Cast cup in select models and acoustic head act as a heat sink for dissipating heat produced by the voice coil contributing to long and trouble-free service. The high sound pressure level (SPL) achieved produces a clear, crisp and intelligible sound of high level, thus consuming less power from the Amplifier. The voice coils used are precision wound on an Aluminum Bobbin, Model PU-50, PU-55, PU-85, PU-100 have 16 impedance & Model PU-60XT PU-80XT have 100 volt line with selectable Power Taps/ impedance. The required Taps/ impedance can easily be selected by changing the position of the rotatory switch of the driver unit.

- Weatherproof and rugged construction.
- High SPL, crisp penetrating sound.
- Voice coils precision-wound on an aluminum bobbin for efficient heat dissipation.
- Selectable power taps/impedance by changing the position of the rotary switch at the rear.
- Degree of protection IP 66 provided, when mounted on a reflex horn, against foreign particles such as dust and jets of water.
- Ideal for outdoor use.



PU 60XT



PU 80XT

MODEL NO.	PU 60	PU 80
INPUT POWER	60W RMS/ 90W MAX	80W RMS/ 100W MAX
IMPEDENCE	ON 100V Line	ON 100V Line
FREQUENCY RESPONSE	160-7000Hz	160-7000Hz
DIMENSION	W150 x H137	W125 x H143
WEIGHT	2.24KG	2.47KG
MATERIAL	Die-Cast Aluminium Acoustic Head (Flange)	Die-Cast Aluminium Acoustic Head (Flange)



PU 50



PU 55



PU 85



PU 100

MODEL NO.	PU 50	PU 55	PU 85	PU 100
INPUT POWER	50W RMS/ 100W MAX	55W RMS/ 100W MAX	85W RMS/ 120W MAX	100W RMS/ 150W MAX
IMPEDENCE	16Ω	16Ω	16Ω	16Ω
FREQUENCY RESPONSE	160-7000Hz	160-7000Hz	160-7000Hz	160-7000Hz
DIMENSION	W113 x H89	W113 x H89	W119 x H95	W125 x H100
WEIGHT	1.48 KG	1.72KG	1.89KG	2.05KG
MATERIAL	Die-Cast Aluminium Acoustic Head (Flange)			

HORN & TRUMPET

PENZA Reflex Horns heavy duty iron horns are ideal for many large outdoor installations. Rugged construction and fitted with a protective PVC ring on the flare. Acoustically well designed, these match Penza driver units for an efficient, powerful and clear sound.



18 INCH B TYPE

PENZA Trumpet horn Rugged Aluminium Trumpet Horn, specially made for high efficiency, optimum frequency response and long throw. Suitable for all Penza driver Unit. Like PU50/PU55/PU85/PU100 and or long throw use PU60XT/PU80XT with this horn.



22 INCH




24 INCH

DIAPHRAGMS

The high quality diaphragms used in PENZA Driver Units are specially shaped, reinforced phenolic diaphragms with a precision-wound voice coil on ALUMINIUM former for good heat dissipation. The rigid assembly offers high acoustic properties and is most indestructible in normal service.

The self-centering design requires little skill to replace the diaphragm. These diaphragms can be used in all branded driver units.

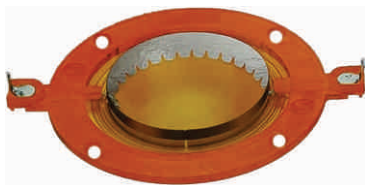

LMT



LMT+ (2 Pcs.)
WITH BOX



PLAIN

ACCESSORIES

VOLUME CONTROLLER




An elegant and compact volume controller for 100V line signals. It enables the user to conveniently adjust the volume of a speaker or group of speakers. It is available in two power ratings of 30W & 5W.

- Attractive, aesthetically pleasing white plastic housing .
- Simple to install against walls, partitions and panels, even after the installation wiring is complete.
- Compatible with all wall and ceiling speakers which have 100V line matching transformer.

MODEL NO.	PV-30	PV-33
WATT	5W	30W
INPUT VOLTAGE	100V	100V
DIMENSION	W 87 x H 87 x D78	W 87 x H 87 x D78
WEIGHT	150g	250g

PV 30 | PV 33

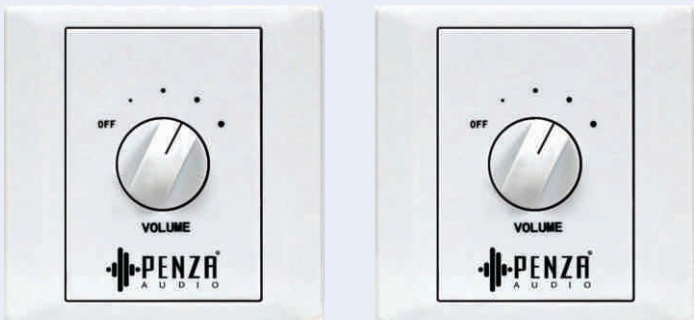

SPEAKER STAND

Aluminum speaker stands designed for quick and easy installation. Equipped with rigid clamping system. A steel locking pin has been provided for extra safety, which gives secure positioning of elevated equipment. Coated with black powder paint for long life.

SS 01 | SS 02




MICROPHONE STAND

Penza Microphone stands employ sturdy mechanism ensuring trouble free movement and positioning of microphones. These stands are functional and resistant to corrosion, due to superior quality of chrome plating.


F 01 | F 02 | PGT | PGN




NETWORK PLATE




D 26




PZN 360




D 450




PN 450




D 460




M 450




PN 518

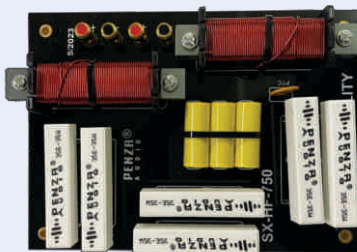


D 750




PN 750



M 750



PN 425



PN 725



Feel the good vibes

